



Construction Authorization

Vance County Health Dept
Environmental Health
115 Charles Rollins Road
Henderson, NC 27536
Phone: (252) 492-5263 Fax: (252) 492-2361

For Office Use Only

*CDP File Number: 359352 - 1

County ID Number: 0600 02035

Evaluated For: NEW

PERMIT VALID UNTIL: 08/08/2028

☐ Open Pump System Sheet

Applicant: Robert & Teresa Floyd

Address: 3217 Ru-Lon Estates

City: Henderson

State/Zip: NC 27537

Phone #: cell : (252) 431-5075

Property Owner: Robert & Teresa Floyd

Address: 3217 Ru-Lon Estates

City: Henderson

State/Zip: NC, 27537

Phone #: cell : (252) 431-5075

Property Location & Site Information

Address/Road #: 3217 Satterwhite Pt Rd
Henderson, NC 27537

Subdivision: Ru-Lon Estate Phase: NEW Lot: 11

Directions:

See attachment

Structure: SINGLE FAMILY

of Bedrooms: 3

of People: 6

*Water Supply: PUBLIC

System Specifications

*Site Classification: Provisionally Suitable

Minimum Trench Depth: 18 Inches

Design Flow: 360

Maximum Trench Depth: 24 Inches

Soil Application Rate: 0.3000

Minimum Soil Cover: Inches

*System Classification/Description:

TYPE III G. OTHER NON-CONV. TRENCH SYSTEMS

Maximum Soil Cover: Inches

*Proposed System:
25% REDUCTION

*Distribution Type: GRAVITY - SERIAL

Nitrification Field: 900 Sq. ft.

Septic Tank: 1,000 Gallons

No. Drain Lines: 6

Pump Required: ☐ Yes ☒ No ☐ May Be Required

Total Trench Length: 300 ft.

☐ Inches O.C.

Pump Tank: Gallons

☒ Feet O.C.

Trench Spacing: 9 -

☐ Inches

Grease Trap: Gallons

Trench Width: 3 -

☒ Feet

Aggregate Depth: inches

Septic Tank Installer

Grade Level Required: ☐ I ☐ II ☐ III ☐ IV

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements.

*Permit Conditions:

SEPTIC TO MEET SETBACK'S FROM BUILDING AND PROPERTY LINES.
CONTRACTOR TO ESTABLISH AND FOLLOW CONTOUR.

The Authorization for Wastewater System Construction shall be valid for a period equal to the period of validity of the Improvement Permit and may be issued at the same time the Improvement Permit issued (NCGS 130A-336(b)). If the installation has not been completed during the period of validity of the Construction Permit, the information submitted in the application for a permit or Construction Authorization shall become invalid, and may be suspended or revoked (.1937(g)). The person owning or controlling the system shall be responsible for assuring compliance with the laws, rules, and permit conditions regarding system location, installation, operation, maintenance, monitoring, reporting

Authorized State Agent: Diamond, Chris

Date of Issue: 08/08/2023

☐ Hand Drawing

☐ Import Drawing

Site Plan/Drawing attached.

Total Time : (HH:MM)



IMPROVEMENT PERMIT

Vance County Health Dept
Environmental Health
115 Charles Rollins Road
Henderson, NC 27536
Phone: (252) 492-5263 Fax: (252) 492-2361

For Office Use Only

*CDP File Number: 359352 - 1
County ID Number: 0600 02035
Evaluated For: NEW

PERMIT VALID UNTIL: 08/08/2028

***NOTE TO INSPECTIONS DIVISION:** Building Permits cannot be issued with this Improvement Permit.

Applicant: Robert & Teresa Floyd

Address: 3217 Ru-Lon Estates

City: Henderson

State/Zip: NC 27537

Phone #: cell : (252) 431-5075

Property Owner: Robert & Teresa Floyd

Address: 3217 Ru-Lon Estates

City: Henderson

State/Zip: NC. 27537

Phone #: cell : (252) 431-5075

Property Location & Site Information

Address: 3217 Satterwhite Pt Rd
Henderson, NC 27537

Subdivision: Ru-Lon Estate

Block/Phase: NEW

Lot: 11

Directions

See attachment

Road #:

Structure: SINGLE FAMILY

of Bedrooms: 3

of People: 6

*Water Supply: PUBLIC

System Specifications

Initial System

*Site Classification: Provisionally Suitable

Design Flow: 360

Soil Application Rate: 0.3000

Minimum Trench Depth: 18 Inches

Maximum Trench Depth: 24 Inches

*System Classification/Description:

TYPE III G. OTHER NON-CONV. TRENCH SYSTEMS

Septic Tank: 1000 Gallons

Pump Required: ☐ Yes ☒ No ☐ May Be Required

*Proposed System:
25% REDUCTION

Pump Tank: _____ Gallons

Repair System Required: ☒ Yes ☐ No ☐ No, but has Available Space

Repair System

*Site Classification: Provisionally Suitable

Soil Application Rate: 0.300

Minimum Trench Depth: 18 Inches

Maximum Trench Depth: 24 Inches

*System Classification/Description:

TYPE III G. OTHER NON-CONV. TRENCH SYSTEMS

Pump Required: ☒ Yes ☐ No ☐ May Be Required

*Proposed System: 25% REDUCTION

Pump Tank: _____ Gallons

No grading or construction activity is allowed in areas designated for system and repair without approval of Health Department.

*Site Modifications

The issuance of this permit by the Health Department in no way guarantees the issuance of other permits. The permit holder is responsible for checking with appropriate governing bodies in meeting their requirements.


*Permit Conditions

SEPTIC TO MEET SETBACK'S FROM BUILDING AND PROPERTY LINES.
CONTRACTOR TO ESTABLISH AND FOLLOW CONTOUR.

The Department and Local Health Department may impose conditions on the issuance and may revoke the permits for failure of the system to satisfy the conditions, the rules, or this article. This permit is subject to revocation if the site plan, plat, or intended use changes (NCGS 130A-335(f)). The person owning or controlling the system location, installing, operation, maintenance, monitoring, reporting, and repair (.1938(b)).

Authorized State Agent:

Diamond, Chris



Date of Issue:

08/08/2023

Total Time: (HH:MM)

☐ Hand Drawing☐ Import Drawing****Site Plan/Drawing attached.****

____ : ____

Granville-Vance Dist. Health Department
Environmental Health

Pip

Permit Number 359352

8 Improvement Permit

X Construction Authorization

SITE SKETCH
ON-SITE / WELL

Robert & Teresa Floyd
Applicants Name



3217 S. Herwhite Pt Rd
Address

Ru-Lon Estates .. Lot 11
Subdivision - Section - Lot

Ch Izal
Authorized State Agent

8-8-23
Date

System components represent approximate contours only. The contractor must flag the system prior to beginning the installation to ensure that proper grade is maintained.

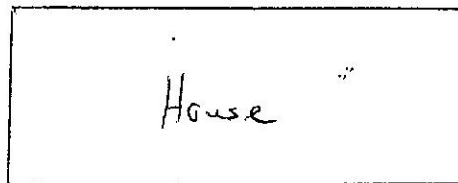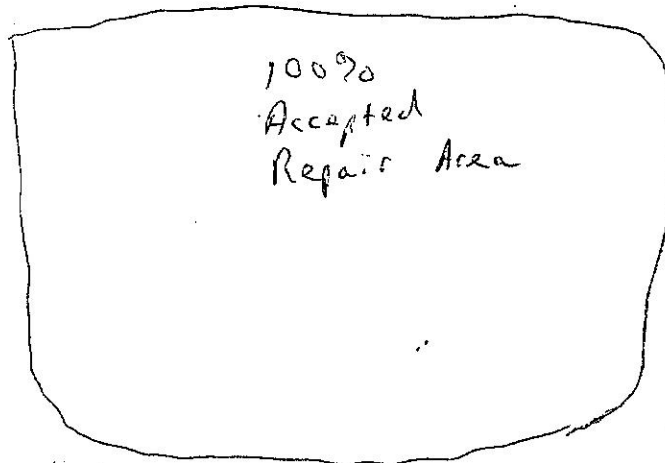

Driveway

