

U-910

LEGEND

- Iron pin found
- Iron pin set
- ▲ P.K. Nail found
- △ P.K. Nail set
- Traverse point
- Planted stone found
- ⊙ Concrete monument set
- ⊙ Concrete monument found
- ⊙ Concrete right-of-way monument found
- ⊙ Concrete right-of-way monument set
- Iron pin set by found planted stone
- ⊙ Iron pin set (with stones)
- ⊙ N.C.G.S. Monument found
- Utility pole
- R/W... Right-of-way
- Property line
- Existing San. Swr.
- Existing Storm Swr.
- Existing Elec. Pow. Line
- Buried Elec. Pow. Line
- Ovh. Telephone Line
- Buried Telephone Line
- Existing gas main
- Existing water main
- Proposed water main
- Center line

Chord Bearings and Distances

Chord	Bearing	Distance
aaa-a	S42°45'21"E	114.03'
a-b	S05°27'26"W	38.46'
b-c	S44°25'51"W	9.65'
c-d	S41°51'28"W	14.27'
d-e	S25°22'30"W	125.30'
e-f	S03°15'05"E	116.97'
f-g	S07°13'51"W	20.57'
g-h	S03°49'35"W	55.77'
h-i	S52°31'03"E	57.53'
i-j	N67°25'07"E	62.55'
j-k	N05°13'02"E	61.42'
k-l	N46°41'15"W	43.24'
l-m	N42°03'49"W	21.72'
m-n	N13°36'17"E	184.57'
n-o	N52°48'26"E	79.65'
o-p	N74°28'38"E	106.01'
p-q	S48°07'52"E	42.43'
q-r	S41°52'06"W	42.43'
r-s	S80°54'37"W	51.91'
s-t	S61°23'53"W	117.18'
t-u	S40°07'52"E	67.10'
u-v	S57°15'32"W	21.00'
v-w	S48°09'52"W	66.99'
w-x	S16°45'49"E	61.79'
x-y	S76°24'25"E	57.53'
y-z	N46°17'43"E	57.53'
aa-bb	N00°11'33"E	35.99'
bb-cc	N07°34'41"E	21.00'
cc-dd	N47°16'47"E	97.46'
dd-ee	N74°30'17"E	81.37'
ee-ff	S70°37'53"E	22.96'
ff-gg	N41°52'06"E	42.43'
gg-hh	S83°28'55"W	36.28'
hh-ii	S72°58'05"W	76.17'
ii-jj	N74°17'11"W	38.46'
jj-kk	N42°45'22"W	131.44'


Department of Transportation
Division of Highways
Proposed Subdivision Road
Construction Standards Certification
Approved *[Signature]*
District Engineer
Date 9/22/90

N.C. Grid Station "STEWART"
N: 279854.193 meters NAD 83
E: 662683.004 meters

Mildred S. Wortham and
W.H. Stone, Jr.
D.B. 536 Pg. 310

W.W. Properties
D.B. 614 Pg. 285
P.B. "U" Pg. 590

Chord	Bearing	Distance
uu-vv	S85°10'20"E	72.29'
vv-ww	N30°04'37"E	55.80'
ww-xx	N22°52'54"W	51.19'
yy-zz	N25°37'57"W	22.96'

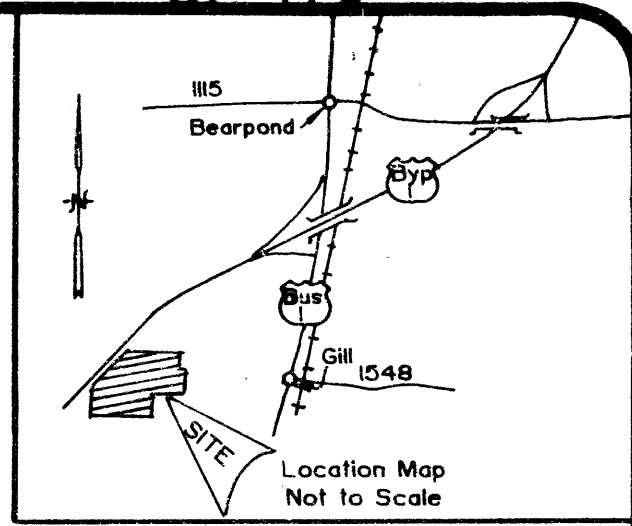


Reference:
D.B. 614 Pg. 285
P.B. "U" Pg. 590

Margaret Oakley and
Catherine O. Hannon
D.B. 167 Pg. 382

M.W. Dickerson and wife
Laura C. Dickerson
D.B. 574 Pg. 325

Curve	Delta Δ	Radius R	Tangent T	Length L
1	61°44'00"	215.00'	128.51'	231.65'
2	43°20'26"	277.00'	110.07'	209.53'
3	54°27'00"	220.00'	113.19'	209.07'
4	16°41'00"	423.00'	62.02'	123.17'

Mamie W. Stone
D.B. 100 Pg. 67



I, John Lee Hamme certify, that under my direction and supervision this map was drawn from an actual field survey; that the error of closure of the survey as calculated by latitudes and departures is 1: 7500; that this map was prepared in accordance with G.S. 47-30 as amended. Witness my original signature, registration number and seal this 23rd day of July, 1990.

[Signature]
Surveyor
Registration Number L-1064



North Carolina, Vance County
I, a Notary Public of the County and State aforesaid certify that John Lee Hamme, a registered land surveyor, personally appeared before me this day and acknowledged the execution of the foregoing instrument.
Witness my hand and official stamp or seal this 23rd day of July, 1990.

[Signature]
My commission expires Oct. 2, 1993 Notary Public



JOHN L. HAMME
CIVIL ENGINEER & LAND SURVEYOR
151 BELLE ST.
HENDERSON, N.C. 27536

Prepared by *[Signature]* QC
Date February 27, 1990
Scale 1 inch = 100 feet

Plat of
Cobble Stone
Kittrell Township
Vance County
North Carolina
File N-2-180

File N-2-180