ADDRESS

Gold Medal Homes of NC
PO Box 1145
Cherryville, NC 28021

Plant Number

Date of Manufacture	HUD Label No.(s)
1/29/98	NTA 7660065/7660066

Manufacturer's Serial Number and Model Unit Designation

GCE1080 98 NC A&B 464 4B 2BA 4010

Design Approval by (D.A.P.I.A.) NTA, Inc.

This manufactured home is designed to comply with the federal manufactured home construction and safety standards in force at time of manufacture. (For additional information, consult owner's manual.)

The factory installed equipment includes:

Equipment	Manufacturer	Model Designation
For heating	Intertherm	E2EB-015H
For air cooling		
For cooking	GE	JBC27B4W
Refrigerator	GE	TFX20JR
Water Heater	Nordyne	IN1522OR
Washer		
Clothes Dryer		
Dishwasher		
Garbage Disposal		
Fireplace		
Stereo		
Smoke Detector	Fire X	

MANUFACTURER

ADDRESS

Gold Medal Homes of NC
PO Box 1145
Cherryville, NC 28021

Date of Manufacture	HUD Label No.(s)	Plant Number
1/29/98	NTA 766065/766066	

Manufacturer's Serial Number and Model Unit Designation
GCE1080 98 NC A&B 464 4B 2BA 4010

Design Approval by (D.A.P.I.A.) NTA, Inc.

This manufactured home is designed to comply with the federal manufactured construction and safety standards in force at time of manufacture. (For additional information, consult owner's manual.)

The factory installed equipment includes:

Equipment	Manufacturer	Model Desi
For heating	Intertherm	E2EB
For air cooling		
For cooking	GE	JBC2
Refrigerator	GE	TFX2
Water Heater	Nordyne	IN15
Washer		
Clothes Dryer		
Dishwasher		
Garbage Disposal		
Fireplace		
Stereo		
Smoke Detector	Fire X	

HOME CONSTRUCTED FOR ☒ Zone I ☐ Zone I ☐ III

This home has not been designed for the higher wind pressure rovisions required for ocean/coastal areas and should not be located within 1500' of the c Zones II and III, unless the home and its anchoring and foundation system have been d increased requirements specified for Exposure D in ANSI/ASCE 7-88.

This home has___has not X been equipped with storm shutters tive coverings for windows and exterior door openings. For homes designed to b located in nd III, which have not been provided with shutters or equivalent covering device , it is stro ded that the home be made ready to be equipped with these devices in accorda ce with ommended in manufacturers printed instructions.

F ONE MAP

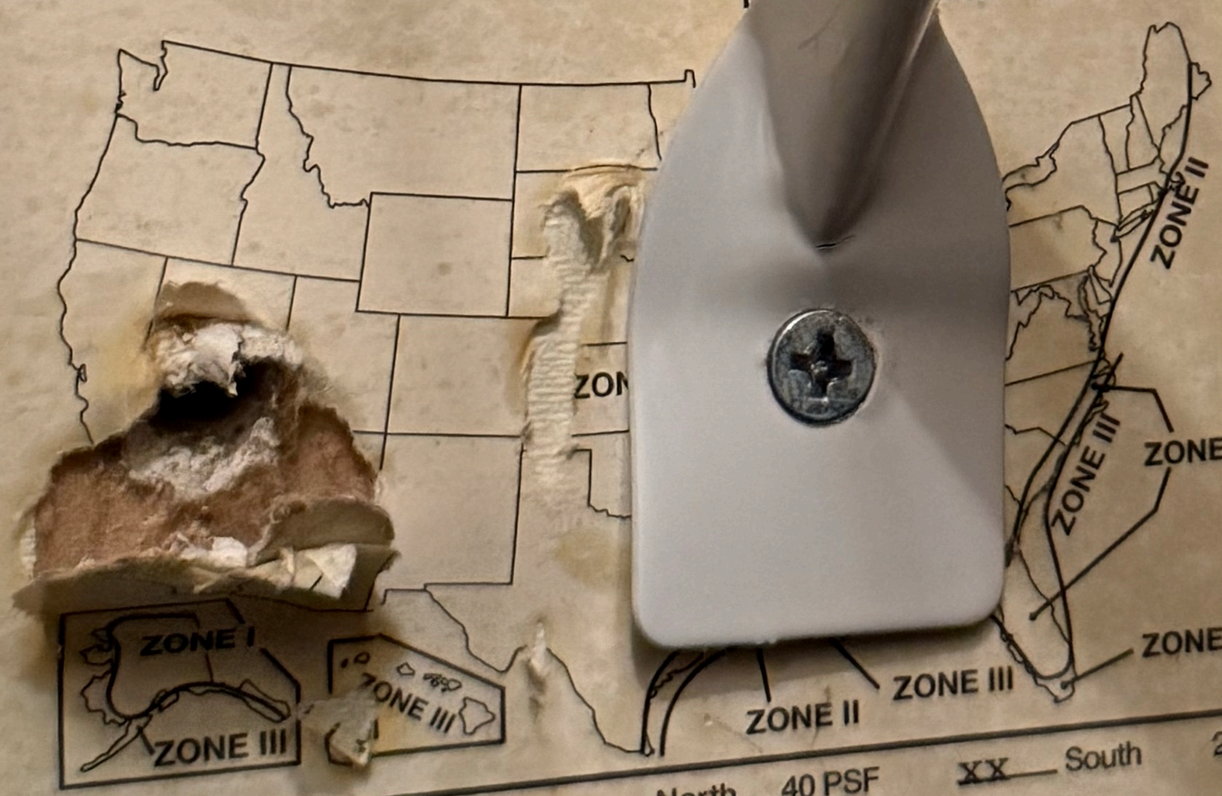

DESIGN ROOF LOAD ZONE MAP

___ North 40 PSF
___ Middle 30 PSF
XX South 20 PSF
___ Other ___ PSF

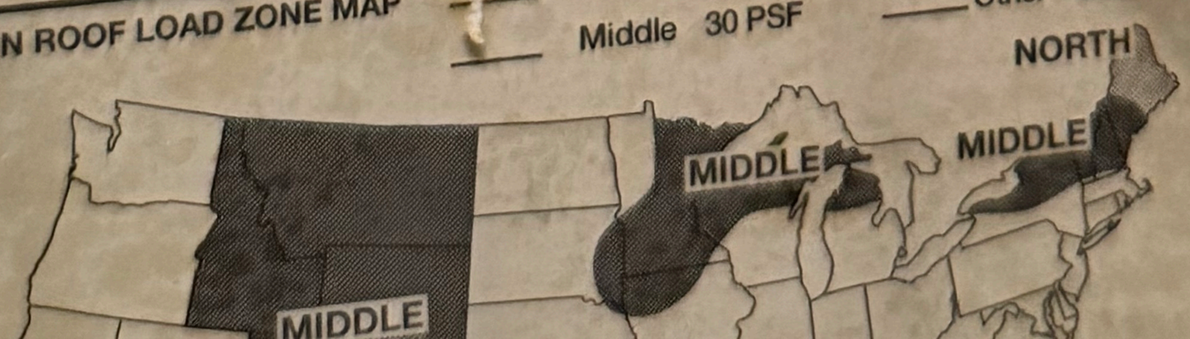

COMFORT HEATING

red home has been thermally insulated to conform with the requ manufactured home construction and safety standards for all 3 lue zone _____.
pment manufacturer and model (see list at left).
heating equipment has the capacity to maintain an average 70° F temp at outdoor temperatures of -22 °F.
nize furnace operating economy, and to conserve energy, it is recommende e installed where the outdoor winter design temperature (97 1/2%) is not h 0 _____ degrees Fahrenheit.
bove information has been calculated assuming a maximum wind velocity of dard atmospheric pressure.

COMFORT COOLING

☐ **Air conditioner provided at factory (Alternate I)**

Air conditioner manufacturer and model (see list at left).

Certified capacity _____ B.T.U./hour in accordance with the air conditioning and refrigeration institute standards.
The central air conditioning system provided in this home has been sized orientation of the front (hitch end) of the home facing _____. On th system is designed to maintain an indoor temperature of 75° F whe

temperatures are _____°F dry bulb and _____°F wet bulb.

The temperature to which this home can be cooled will change dependi amount of exposure of the windows of this home to the sun's radiant heat. T home's heat gains will vary dependent upon its orientation to the sun and an shading provided. Information concerning the calculation of cooling load locations, window exposures and shadings are provided in Chapter 22 of the of the ASHRAE Handbook of Fundamentals.

Information necessary to calculate cooling loads at various locations and o provided in the special comfort cooling information provided with this home

☒ **Air conditioner not provided at factory (Alternate II)**
The air distribution system of this home is suitable for the installation conditioning.

The supply air distribution system installed in this home is sized for a manuf

central air conditioning system of up to 35502 B.T.U./hr. rated capa certified in accordance with the appropriate air conditioning and refriger standards, when the air circulators of such air conditioners are rated at column static pressure or greater for the cooling air delivered to the manuf supply air duct system.
Information necessary to calculate cooling loads at various locations and provided in the special comfort cooling information provided with this manuf

☐ **Air conditioning not recommended (Alternate III)**
The air distribution system of this home has not been designed in anticipa with a central air conditioning system.

To determine the required capacity of equipment to cool a home efficiently an a cooling load (heat gain) calculation is required. The cooling load is dependent tion, location and the structure of the home. Central air conditioners operate and provide the greatest comfort when their capacity closely approximates cooling load. Each home's air conditioner should be sized in accordance wit the American Society of Heating, Refrigerating and Air Conditioning Engin Handbook of Fundamentals 1989 edition, once the location and orientation are k

INFORMATION PROVIDED BY THE MANUFACTURER NECESSARY TO CALCULATE SENSIBLE HEAT GAIN

Walls (without windows and doors) ..... "U"
Ceilings and roofs of light color) ..... "U"
Ceilings and roofs of dark color ..... "U"
Floors ..... "U"
Air ducts in floor ..... "U"
Air ducts in ceiling ..... "U"
Air ducts installed outside the home ..... "U"
The following are the duct areas in this home:
Air ducts in floor .....
Air ducts in ceiling .....
Air ducts outside the home .....

U/O VALUE ZONE MAP