


|                |                                |                                |                                 |
|----------------|--------------------------------|--------------------------------|---------------------------------|
| <b>System:</b> | ST                             | PT                             | #2                              |
| <b>Repair:</b> |                                |                                |                                 |
|                | ST                             | PT                             | #2                              |
|                | = 1000 gallon tank with risers | = 1200 gallon tank with risers | = profile description locations |

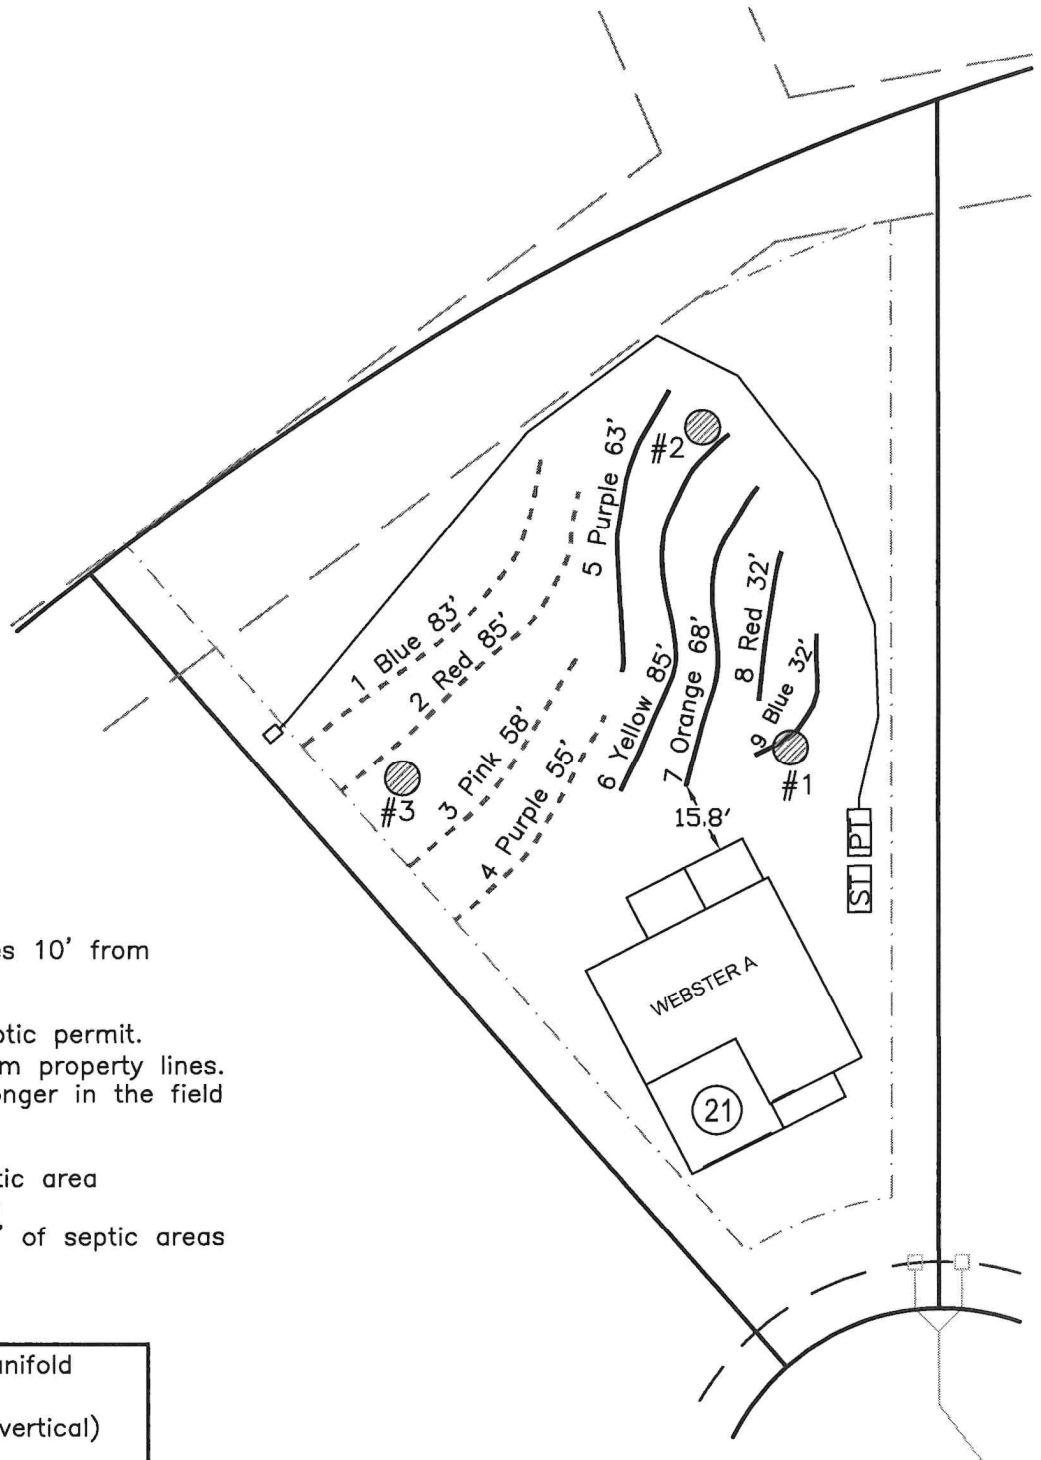

- \*Keep tanks and drain lines 10' from property lines.
- \*Not a survey.
- \*Not a guarantee of a septic permit.
- \*Keep supply lines >5' from property lines.
- \*Some lines are flagged longer in the field than lengths indicate.
- \*No grading septic area.
- \*No adding soil within septic area
- \*No rutting-up septic area
- \*No cuts of >2' within 15' of septic areas

Initial System: Pressure Manifold  
Lines: 1-4, (281')  
T&J Panel Block System (vertical)  
0.3 Soil LTAR  
32" Trench Bottom

Repair System: Pressure Manifold  
Lines: 5-9, (280')  
T&J Panel Block System (vertical)  
0.3 Soil LTAR  
32" Trench Bottom

GRAPHIC SCALE  
1" = 40'



Central Carolina Soil Consulting, PLLC  
1900 South Main Street, Suite 110  
Wake Forest, North Carolina 27587  
Phone (919)569-6704 Fax (919)569-6703

4-Bedroom Septic Layout  
Lot 21, Maison Ridge Subdivision  
Franklin County, North Carolina

Job#: 4862  
Drawn By: JR  
Date: 09/24/2024  
Revision: