



3804 LAUREL HILL - MBM BUILDERS

SHAQUILLE SMITH

☎ 984-800-1245 ✉ SHAQS@KANDBGALLERIES.COM

📍 8411 GLENWOOD AVE STE. 107 RALEIGH, NC 27612

Table of Contents

VENDOR PART	VENDOR	DESCRIPTION	PAGE
THERMADOR			
THERMADOR Collective Images			4
T36FL810NS	Thermador	Masterpiece 36" Freestanding French Door Bottom Freezer, 4 Door, Counter Depth - Stainless Steel	5
DWHD660EFM	Thermador	Sapphire 24" Dishwasher Masterpiece Handle - Stainless Steel	10
MEM301WS	Thermador	Masterpiece Comb Oven, 30", Select, Solo Microwave - Stainless Steel	13
PCG366W	Thermador	Professional Rangetop 36" 6 Burner - Stainless Steel	17
VCIN36GWS	Thermador	Professional 36" Insert, Optional Blower - Custom	23
VTN2DA	Thermador	700 CFM Integral Blower	28

VENDOR PART	VENDOR	DESCRIPTION	PAGE
T36FL810NS	Thermador	Masterpiece 36" Freestanding French Door Bottom Freezer, 4 Door, Counter Depth - Stainless Steel	5
DWHD660EFM	Thermador	Sapphire 24" Dishwasher Masterpiece Handle - Stainless Steel	10
MEM301WS	Thermador	Masterpiece Comb Oven, 30", Select, Solo Microwave - Stainless Steel	13
PCG366W	Thermador	Professional Rangetop 36" 6 Burner - Stainless Steel	17
VCIN36GWS	Thermador	Professional 36" Insert, Optional Blower - Custom	23
VTN2DA	Thermador	700 CFM Integral Blower	28



Approved

THERMADOR
Masterpiece 36" Freestanding
French Door Bottom Freezer, 4
Door, Counter Depth - Stainless
Steel

QTY: 1 | MODEL #: T36FL810NS

\$5034.00

SALE PRICE



Approved

THERMADOR
Sapphire 24" Dishwasher
Masterpiece Handle - Stainless
Steel

QTY: 1 | MODEL #: DWHD660EFM

\$500.00

SALE PRICE



Approved

THERMADOR
Masterpiece Comb Oven, 30",
Select, Solo Microwave -
Stainless Steel

QTY: 1 | MODEL #: MEM301WS

\$6411.00

SALE PRICE



Approved

THERMADOR
Professional Rangetop 36" 6
Burner - Stainless Steel

QTY: 1 | MODEL #: PCG366W

\$4654.00

SALE PRICE



Approved

THERMADOR
Professional 36" Insert,
Optional Blower - Custom

QTY: 1 | MODEL #: VCIN36GWS

\$0.00

SALE PRICE



Approved

THERMADOR
700 CFM Integral Blower

QTY: 1 | MODEL #: VTN2DA

\$759.00


SALE PRICE



T36FL810NS

36-INCH STAINLESS STEEL FREESTANDING FRENCH DOOR BOTTOM FREEZER

MASTERPIECE® COLLECTION HANDLES



Also Available In:
T36FL821NS – Professional Collection Handles

FEATURES & BENEFITS

- Best in class lighting: see everything with a fully illuminated back panel and adjustable theater lighting
- Dual evaporators / dual compressors
- Internal ice and water provides easy access with a clean exterior
- ThermaFresh® system, humidity and temperature controlled drawer

STYLE

Door Style	Stainless Steel Panel
Handle Style	Masterpiece®
Interior Finish	Illuminated Back Panel
Door Configuration	4-door

INNOVATION

Wi-Fi-Enabled for Control with Home Connect® App	Yes
Remote Monitoring and Control	Yes
Camera in the Appliance	No

PERFORMANCE

ThermaFresh® System	Yes
Dual Compressor	Yes
Dual Evaporators	Yes
Automatic Defrosting	Yes

Modes

Eco, Sabbath, Vacation, Demo, SuperCool, SuperFreeze®

Internal Water Dispenser	Yes
Water Filter (6 Months)	Yes
Air Fresh Filter	Yes
Ethylene Filter (6 Months)	Yes

CAPACITY AND STORAGE

Total Capacity (cu. ft.)	20.4
Refrigerator Capacity (cu. ft.)	14.4
Freezer Capacity (cu. ft.)	6
Tiered Freezer Storage Drawer	3 Tier
ThermaFresh® Temperature & Humidity Managed Drawer	1

ThermaFresh® Drawer Modes (° F/Humidity)

Meat/Fish (29° F/Low), Fruit (32° F/Low), Vegetables (32° F/High), Beverages (34° F/Low), Snacks/Misc. (40° F/Low)

Storage Shelves	4 Adjustable, 1 Fixed
Shelf Material	Glass w/Metal Profile
Standard Door Bins	3 Adjustable
Gallon Door Bins	2 Adjustable
Dairy Door Bins	1 Adjustable

GENERAL FEATURES

Full 72" Height and True Counter-Depth for Built-In Appearance	Yes
Internal Control Panel	Yes
Water Tank Capacity (oz.)	30.4
Water Filter Replacement Indicator	Yes
Ice Maker with Diamond Ice System	Yes
Ice Production (24 Hrs.), Diamond Ice (lbs.)	3.5
Ice On / Off	Yes
Ice Storage Capacity (lbs.)	8.8
Lighting	LED Recessed Side Light Bars & Fully Illuminated Back Panel
Independent Cooling Systems	2
Door Alarm	Yes
Cooling System	Multi-Air-Flow
Maximum Sound Level	40 dBA

T36FL810NS

36-INCH STAINLESS STEEL FREESTANDING FRENCH DOOR BOTTOM FREEZER

MASTERPIECE® COLLECTION HANDLES



GENERAL FEATURES (CONTINUED)

Star-K Certified Sabbath Mode	Yes
ENERGY STAR® Certified	Yes
Annual Energy Consumption*	568 kWh

OPERATING TEMPERATURE

Refrigerator: 33°F (1°C) to 43°F (6°C)
Freezer: -7°F (-22°C) to 6°F (-14°C)
ThermaFresh® Drawer: 29°F (-2°C) to 40°F (4°C) 5 Preset Modes
SuperCool: 36°F (2°C) for 6 Hours
SuperFreeze®: -22°F (-30°C) for 8 hours

INSTALLATION FEATURES

Four Point Front Adjustable with 4 Wheels	Yes
Front Serviceable	Yes

TECHNICAL SPECS

Required Power Supply	110-127 V, 60 Hz, 15 Amp
Plug Type	120V-3-Prong
Power Cord Length (Inches)	67"

DIMENSIONS AND WEIGHT

Overall Width (Inches)	35 5/8"
Overall Height (Inches)	72"
Overall Depth (Inches)	31 1/8"
Overall Depth Without Hinges and Doors (Inches)	24"
Overall Depth With Hinges and Doors, No Handles (inches)	28 3/4"
Required Cutout Size (HxWxD) (Inches)	72" x 36" x 25"
Net Weight (Approx.) (lbs.)	348
Gross Weight (Approx.) (lbs.)	375

*Estimated annual energy consumption. Exact usage may vary.

OPTIONAL ACCESSORIES

Replacement Water Filter	REPLFLTR55
Ethylene Filter Refill (Part No.)	17005225
Ethylene Filter Starter Kit (Part No.)	17005228
Replacement Carbon Air Filter (Part No.)	10009874
90 Degree Door Stopper	10012733

WARRANTY

Limited Warranty, Parts & Labor	2 Years
---------------------------------	---------

SUPPLEMENTAL MATERIAL


CAD File	Click Here to Download
Installation Manual	Click Here to Download
Use & Care Guide	Click Here to Download
Warranty	Click Here to Download
Energy Guide	Click Here to Download
Home Connect® Quick Start Guide	Click Here to Download

T36FL810NS
36-INCH STAINLESS STEEL FREESTANDING FRENCH
DOOR BOTTOM FREEZER
MASTERPIECE® COLLECTION HANDLES



CUTOUT DIMENSIONS

Measurements in inches (mm)

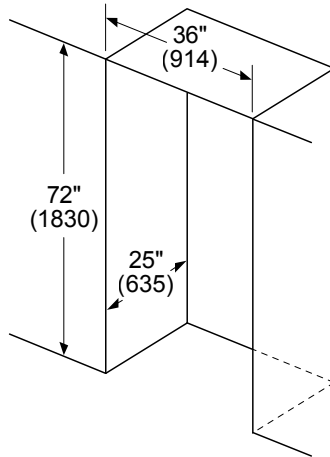


Leave ½" (12.7) gap at the top and 1" (25.4) behind the refrigerator for proper ventilation.

It is recommended that you do not install the refrigerator near a heat source such as a stove or a range.

TOP VIEW CLEARANCE

Measurements in inches (mm)

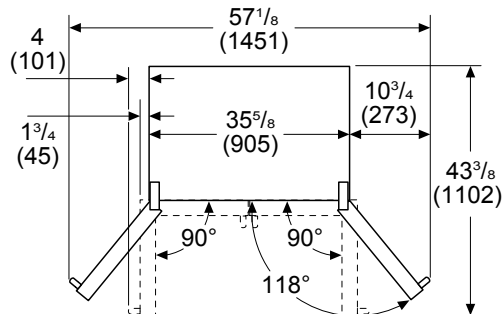


Drawers can be pulled out with door open to 90°
Drawers can be taken out with door completely opened

T36FL810NS
36-INCH STAINLESS STEEL FREESTANDING FRENCH
DOOR BOTTOM FREEZER
MASTERPIECE® COLLECTION HANDLES




PRODUCT DIMENSIONS

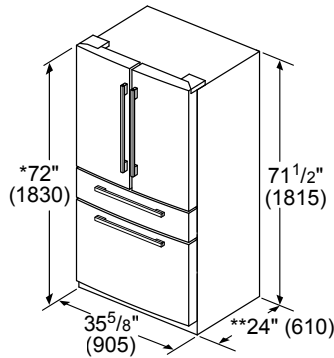


*Add 5/8" (17) with front leveling feet fully extended
 **Add 1" (25) for fixed spacers on back

measurements in inches (mm)

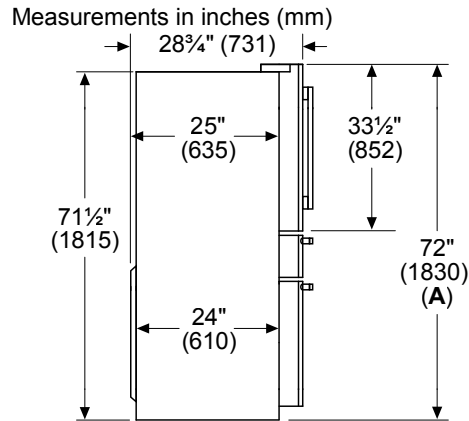

A: Add $\frac{5}{8}$ " (17) with front leveling feet fully extended

measurements in inches (mm)

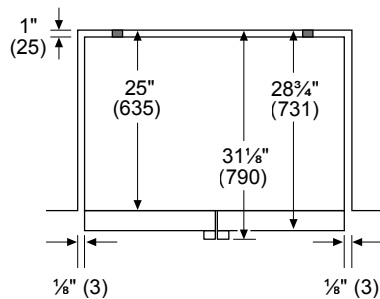

ACCESSORIES (OPTIONAL)



REPLFLTR55
Replacement Water Filter



17005228
Ethylene Filter Starter Kit



17005225
Ethylene Filter Refill



10012733
90 Degree Door Stopper



10009874
Replacement Carbon Air Filter

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.


Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA.THERMADOR.COM | CANADA.THERMADOR.CA | ©2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



DWHD660EFM SAPPHIRE® DISHWASHER MASTERPIECE® COLLECTION HANDLE

Thermador★

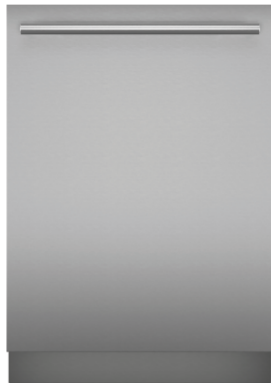

Also Available:
DWHD660EFP – Flat Stainless Steel Panel with
Professional Collection Handle
DWHD660EPR – Custom Panel

FEATURES & BENEFITS

- ★ StarDry™ — No one dries better. Star Dry with Zeolite: the ultra-powerful program that dries dishes better so place settings, glassware, and even sturdy plastics and containers with hard-to-reach crevices are ready for use immediately after each cycle
- ★ Sapphire Glow® light illuminates with the sparkling blue light when the dishwasher is open
 - The Zone Control™ Spray Arm amplifies the exceptional PowerWash™ performance by letting you customize the cleaning power to deep clean even the most challenging dishes, in the lower rack.
 - The Blue PowerBeam® projects a blue light onto the floor to indicate when the dishwasher is in use.
 - Adjustable Chef's Tool Drawer® delivers added loading capacity as well as flexibility to accommodate larger or smaller items, wider ends and utensil handles
 - Flexible folding tines fold down to accommodate larger pots, pans, and dishes and add flexibility to hold items twice as wide as previous models and significantly wider than competitor
 - Smooth-glide ball bearing wheels on lower, upper, and third racks
- Exceptionally Quiet — 44 dBA for a peaceful kitchen experience
- Use the exclusive Home Connect® app to refine your cleanup routine with remote control and receive timely notifications that keep track of every dish tab so you never run out.

GENERAL PROPERTIES

Number of Wash Cycles	6 (Auto, Normal, Quick, Hand Wash, Pots & Pans, Favorite)
Additional Wash Cycles in Home Connect®	3 (Machine Care, Rinse, Glass)
Number of Options	4 (Remote Start, Sanitize, StarDry™, ZoneControl™)
Additional Options in Home Connect®	1 (Save Time)
NSF®-Certified* Sanitize Option	Yes
dBA	44 dBA
Third Rack	Adjustable Chef's Tool Drawer®
Rack Adjustability	Rackmatic 3-Stage
Tub Material	Stainless Steel
Concealed Water Heating Element	Yes
Leak Protection System	24/7 AquaStop®
Water Softener	No
Five-Level Wash	Yes
Childlock	No
Home Connect® (Wi-Fi Enabled)	Yes

EFFICIENCY

Water Usage Per Cycle	3.2 g
CEE Energy Efficiency Class	Tier 1
ENERGY STAR® Certified	Yes
Total Annual Energy Consumption	240 kWh
Total Annual Water Consumption	623.5 g

CAPACITY

Number of Place Settings	16
--------------------------	----

TECHNICAL DETAILS

Watts	1,440 W
Current	12 A
Volts	120 V
Frequency	60 Hz
Power Cord Length	67"
Power Cord Install Length from Corner of Unit when Facing the Door	Left - 45" Right - 56"
Minimum Water Pressure	14 (lb/sin)
Max. Temperature for Water Intake	140° F
Length Inlet Hose	N/A
Length Outlet Hose	90.5"

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	33 7/8" x 23 9/16" x 23 3/4"
Required Cutout Size (HxWxD)	33 7/8" Min. x 24" Min. x 24"
Adjustable Feet	Yes
Net Weight	102 lbs

*Certification to NSF/ANSI Standard 184 for residential dishwashers

DWHD660EFM
SAPPHIRE® DISHWASHER
MASTERPIECE® COLLECTION HANDLE




WARRANTY

Limited Warranty, Entire Appliance, Parts and Labor	2 Year
Limited Warranty for Microprocessor or Printed Circuit Board; Parts Only	3rd to 5th Year
Limited Warranty for Racks (Does Not Include Rack Components); Parts Only	3rd to 5th Year
Limited Warranty for Rust-through On Inner Tub Liner; Parts Only	Lifetime

ACCESSORIES (OPTIONAL)

Dishwasher Installation Kit (Junction Box, 90° Elbow and Water Supply Hose)	SMZ3IN1UC
Dishwasher Supply and Drainage Hose Extension 76 3/4"	SGZ1010UC
Junction Box	SMZPCJB1UC
Cabinet Protector with Power Cord Clip	SMZEPCC1UC
Water Supply Hose	SMZSH1ABUC

DISHWASHER & CUTOUT DIMENSIONS

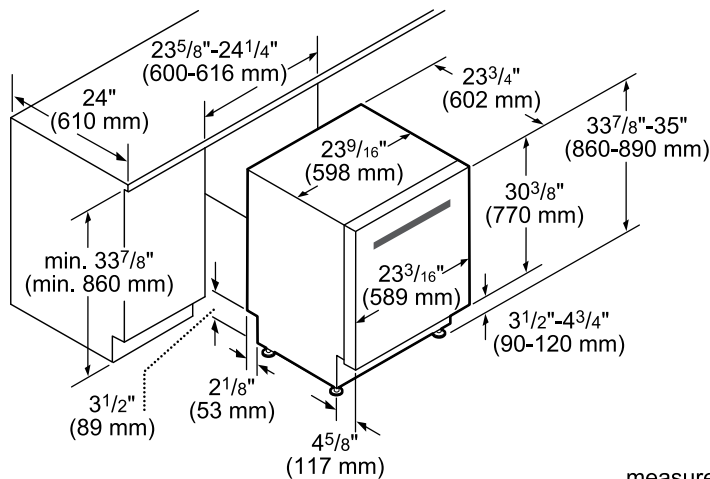

measurements in inches and mm

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



MEM301WS

30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH MICROWAVE

MASTERPIECE® COLLECTION

Thermador★



FEATURES & BENEFITS

- Specially crafted gray glass on stainless steel for a luxurious look and finish
- Designed for flexibility—standard or flush installation into kitchen cabinets
- 950 watts microwave power and 10 microwave power level
- SoftClose® door ensures ultra smooth closing of the oven door
- Fast 2-hour self clean mode

ACCESSORIES (INCLUDED)

Upper Cavity: Glass turntable; Lower Cavity: 1 Telescopic and 2 Standard Oven Racks, Meat Probe

WARRANTY

Limited Warranty Parts and Labor	2 Year
----------------------------------	--------

GENERAL PROPERTIES

Heating Modes – Upper Cavity

(9) Baked Potato, Sweet Potato, Fresh Vegetable, Frozen Vegetable, Ground Meat, Fish / Seafood, Brown Rice, White Rice, Frozen Entrées

Heating Modes – Lower Cavity

(13) Bake, Broil, Roast, Convection Bake, Convection Broil, Convection Roast, Proof, Warm, Pizza, True Convection, Dehydrate, Speed Convection, Slow Roast

Sabbath	Yes
Cleaning Type – Lower Cavity	Easy Clean and Self Clean
Telescopic Rack(s)	1
Illumination Type	Upper Cavity LED Lower Cavity Halogen
Interior Lights	Upper Cavity 1 Lower Cavity 2
Home Connect® (Wi-Fi Enabled)	Yes, Lower Oven Only

OVEN PERFORMANCE

Microwave Power	950 W
Bake / Broil Element – Lower Cavity	2,400 W / 3,800 W
Convection Element – Lower Cavity	2,000 W

TECHNICAL DETAILS

Watts	10,200 W
Circuit Breaker	50 A
Volts; Frequency	240 / 208 V; 60 Hz
Plug Type	Fixed Connection, No Plug
Conduit	60" 4-Wire
Energy Source	Electric

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD)	49" x 29 3/4" x 24 1/2"
Trim Overlaps (Top – Sides – Bottom)	1/2" – 9/16" – 0"
Required Cutout Size (HxWxD) – Standard	48 1/2" x 28 1/2" x 23 1/2"
Required Cutout Size (HxWxD) – Flush	49 1/8" x 30" x 24 1/2"
Microwave Capacity	1.6 cu. ft.
Oven Capacity	4.5 cu. ft.
Overall Lower Oven Interior Dimensions (HxWxD)	17 3/4" x 24" x 17 7/8"
Usable Lower Oven Interior Dimensions (HxWxD)	13 1/2" x 21 5/8" x 16 1/4"
Net Weight	267 lbs



MEM301WS

30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH MICROWAVE

MASTERPIECE® COLLECTION



30-INCH DOUBLE COMBINATION OVEN WITH MICROWAVE

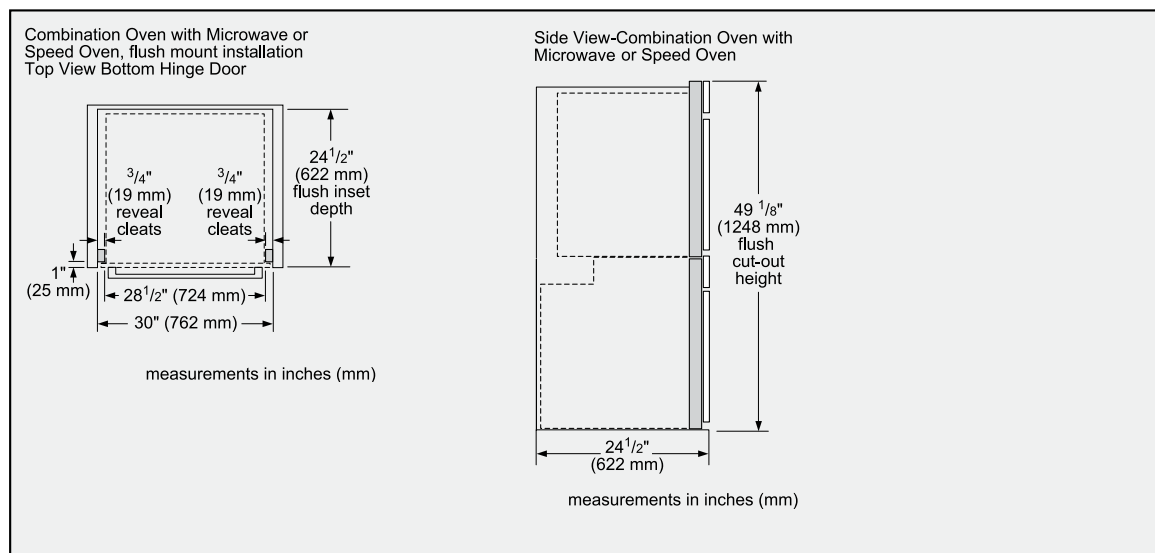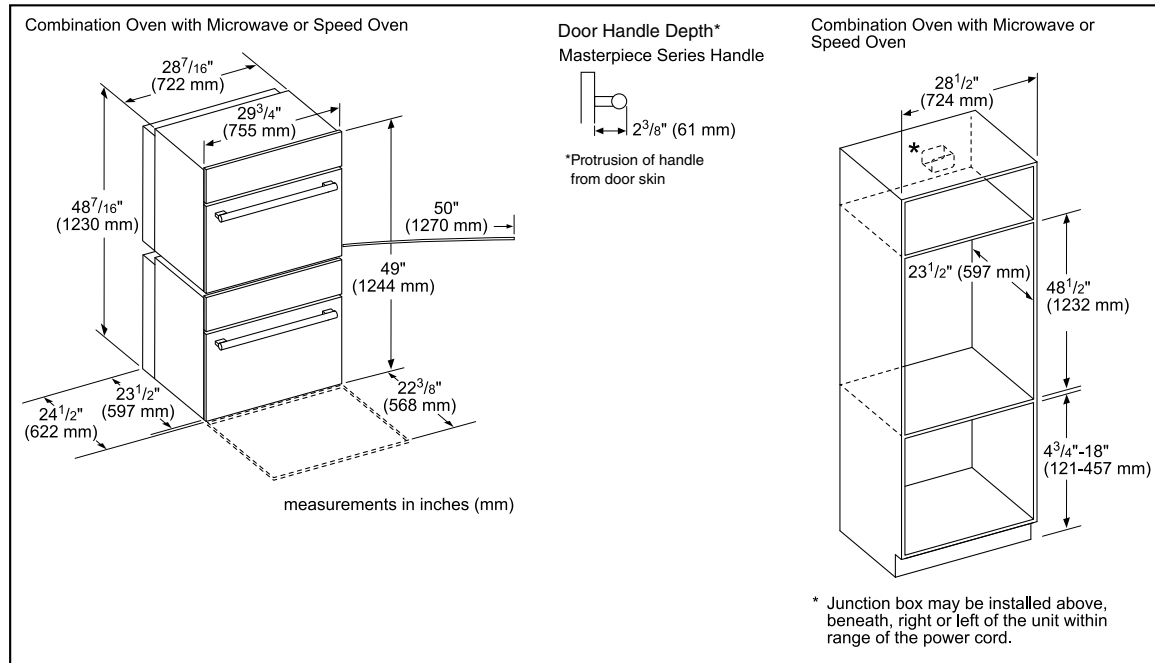



MEM301WS

30-INCH DOUBLE COMBINATION BUILT-IN OVEN WITH MICROWAVE

MASTERPIECE® COLLECTION



INSTALLATION DETAILS

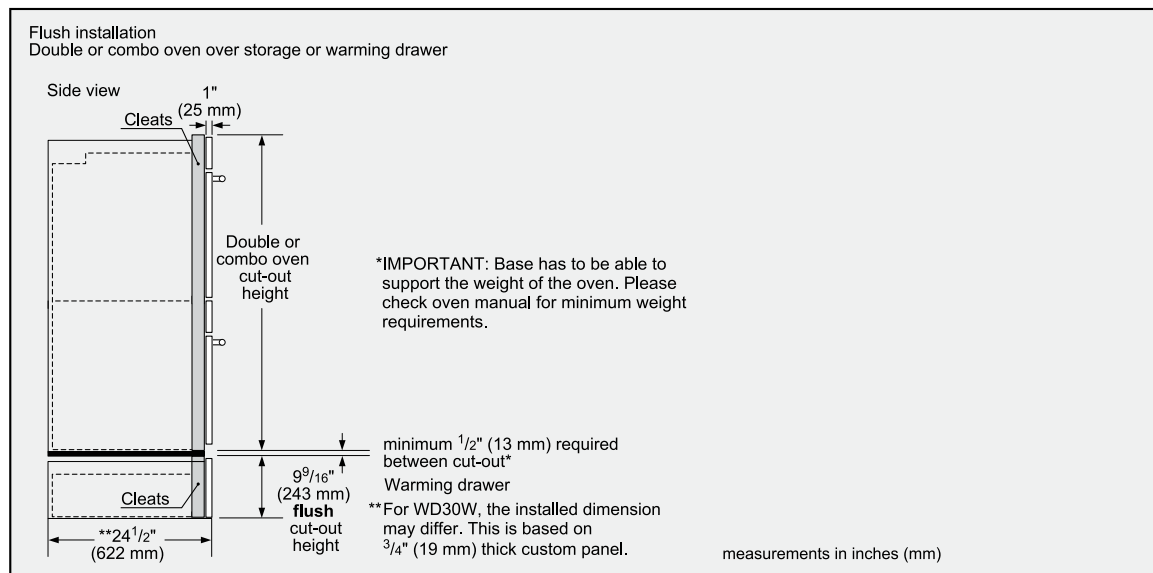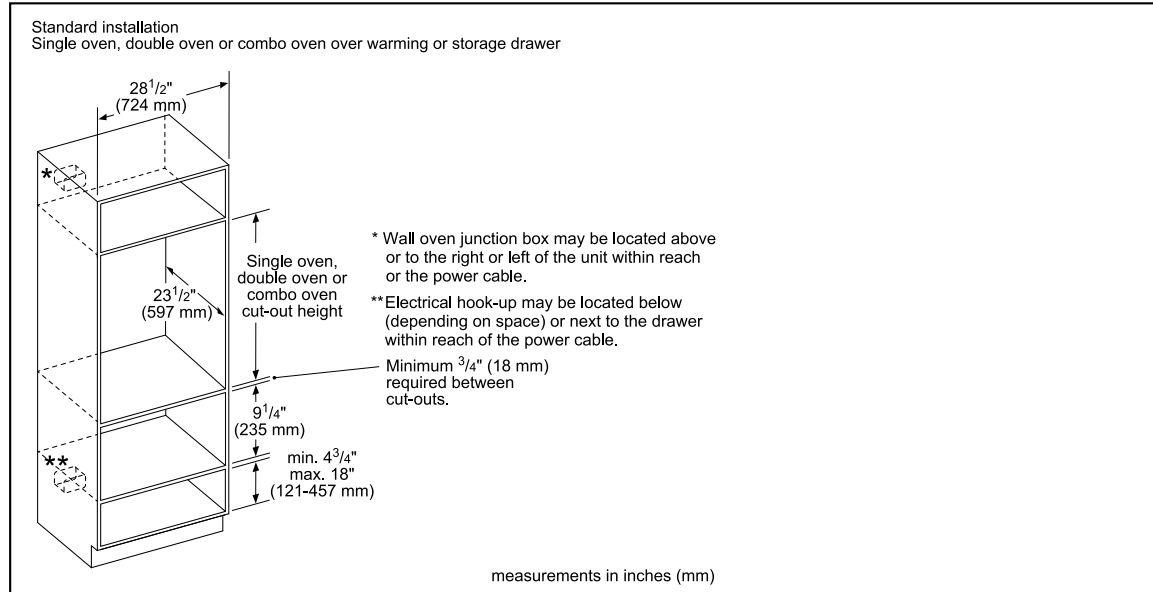

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



PCG366W

36-INCH GAS RANGETOP

PROFESSIONAL COLLECTION, PORCELAIN COOKTOP SURFACE

Thermador★

FEATURES & BENEFITS

- ★ - Exclusive Star® Burner delivers superior flame spread for more even heating with QuickClean Base® designed for easy cleaning
- ★ - 2 ExtraLow® burners offer precision simmering, melting or keeping warm
 - Professional style, continuous cast iron grates
 - LED Down Lighting is hidden discreetly above the control panel, providing functional and stylish illumination
 - Restaurant style metal knobs

GENERAL PROPERTIES

Controls	Metal Knobs
Sealed Burners	Yes
Grate Material	Cast Iron

BURNER PERFORMANCE

Total Number of Cooktop Burners	6
Power of Front Left Burner (NG)	18,000 and XLO (NG)
Power of Back Left Burner (NG)	15,000 and XLO (NG)
Power of Back Center Burner (NG)	15,000 (NG)
Power of Front Center Burner (NG)	18,000 (NG)
Power of Center 12" Electric Griddle (W)	N/A
Power of Center 12" Electric Grill (W)	N/A
Power of Back Right Burner (NG)	15,000 (NG)
Power of Front Right Burner (NG)	18,000 (NG)

TECHNICAL DETAILS

Circuit Breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Plug Type / Receptacle	120V-3 Prong NEMA 5-15
Power Cord Length (in)	65"
Energy Source	Gas
Gas Type	Natural Gas 6" Water Column (14.9 mb) Min. (USA)
Alternative Gas Type	LP 11" Water Column (27.4 mb) Min. (USA)
Convertible To LP (Kit Required)	Yes

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (HxWxD) (in)	8 1/8" x 35 15/16" x 25 13/16"
Required Cutout Size (HxWxD) (in)	7 11/16" x 35 1/8" x 22 13/16"
Minimum Distance From Rear Wall (in)	6" Min. to Combustible Surface
Net Weight (lbs)	142 lbs

WARRANTY

Limited Warranty, Entire Appliance, Parts and Labor	2 Year
---	--------

★ THERMADOR® EXCLUSIVE

PCG366W

36-INCH GAS RANGETOP

PROFESSIONAL COLLECTION, PORCELAIN COOKTOP SURFACE



ACCESSORIES (OPTIONAL)



PAGRIDDLE
Griddle Sits on Top of
Grates Over 2 Star Burners



PA12CHPBLK
12" Cutting Board



PWOKRINGHC
Wok Ring



PA36WLBC
10" Low Backguard



PAKNOBLUWR
Metallic Blue Knob Kit



PALPKITHW
LP Conversion Kit, Pro
Rangetops (4 & 6 Burners)

PAALTKITH


High Altitude Kit, Natural Gas Rangetops, 5,400 ft. to 10,200 ft.

[Contact Customer Support](#)

High Altitude Kit, Gas Rangetops Connected to LP Gas, 10,000 ft. to 10,200 ft.

36" RANGETOP SIDE VIEW

measurements in inches (mm)

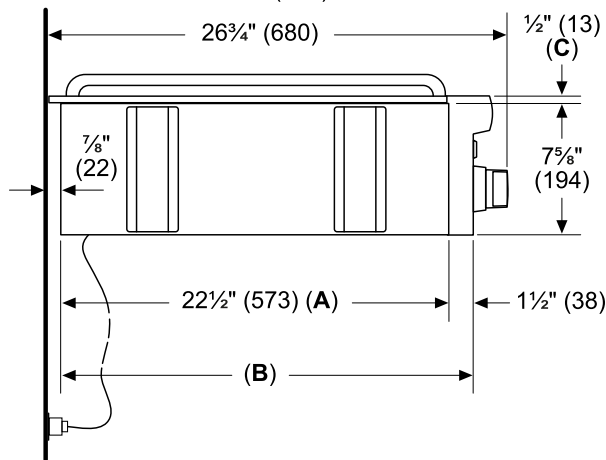

A: Cabinet face for installation
with projecting control panel.
B: Cabinet face for installation
with flush control panel.
C: Side flange

PCG366W


36-INCH GAS RANGETOP

PROFESSIONAL COLLECTION, PORCELAIN COOKTOP SURFACE



36-INCH RANGETOP CUTOUT DIMENSIONS

* Minimum recommended hood width equals that of the range or cooktop.

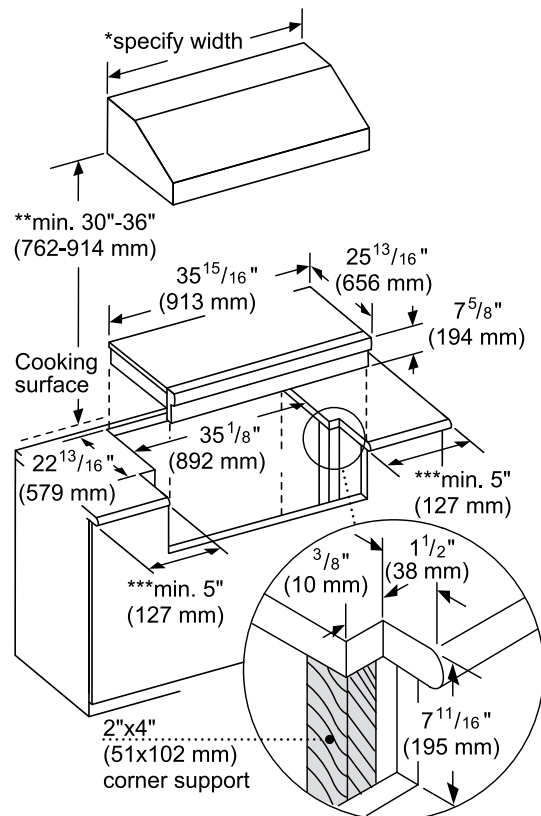

** 36" minimum clearance from cooking surface to combustible surfaces.

*** 5" minimum clearance from cooking surface to combustible side wall.

Note: Most hoods contain combustible components that must be considered when planning the installation.

measurements in inches (mm)


PCG366W 36-INCH GAS RANGETOP PROFESSIONAL COLLECTION, PORCELAIN COOKTOP SURFACE



36-INCH RANGETOP GAS LOCATION

The gas and electrical supply must be located in an area that is accessible without requiring removal of the rangetop. The appliance electrical power cord and gas pipe connection are located on the left rear underside of the rangetop.

The junction box must be located within 3 feet (~900 mm) of the rangetop connection.

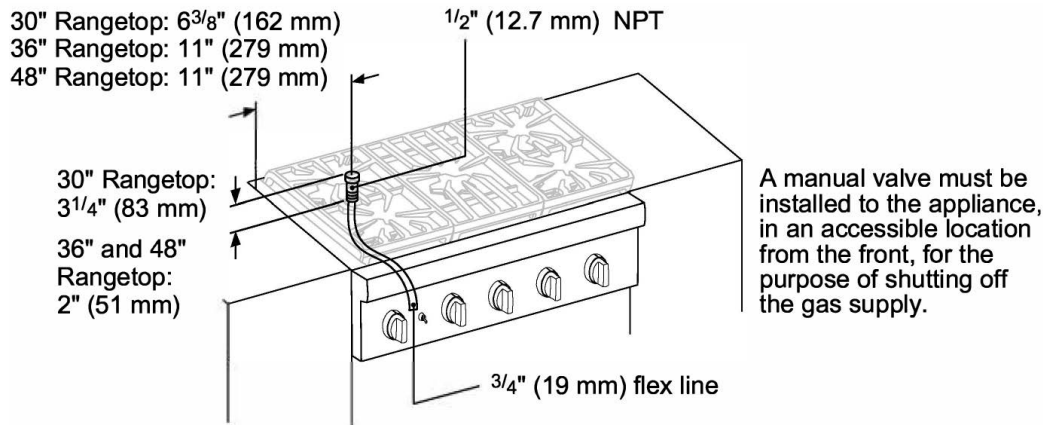

measurements in inches (mm)

NATURAL GAS REQUIREMENTS:

Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)
Supply Pressure: 6" min. to 14" max. water column (14.9 mb to 34.9 mb)
Manifold Pressure: 5" water column (12.5 mb)

PROPANE GAS REQUIREMENTS:

Inlet Connection: 1/2" NPT (min. 3/4" dia. flex line)
Supply Pressure: 11" min. to 14" max. water column (27.4 mb to 34.9 mb)
Manifold Pressure: 10" water column (24.9 mb)

ELECTRICAL SUPPLY

IMPORTANT: The cord supplied with all-burner gas rangetops requires a NEMA 5-15 receptacle as shown here. Local codes may require a different wiring method.



WARNING: This appliance is equipped with a three-prong grounding plug for protection against shock hazard and should be plugged directly into a properly grounded receptacle. DO NOT cut or remove the grounding prong from this plug. DO NOT ALTER THIS PLUG.


PCG366W

36-INCH GAS RANGETOP

PROFESSIONAL COLLECTION, PORCELAIN COOKTOP SURFACE

Thermador★

36-INCH RANGETOP CLEARANCES

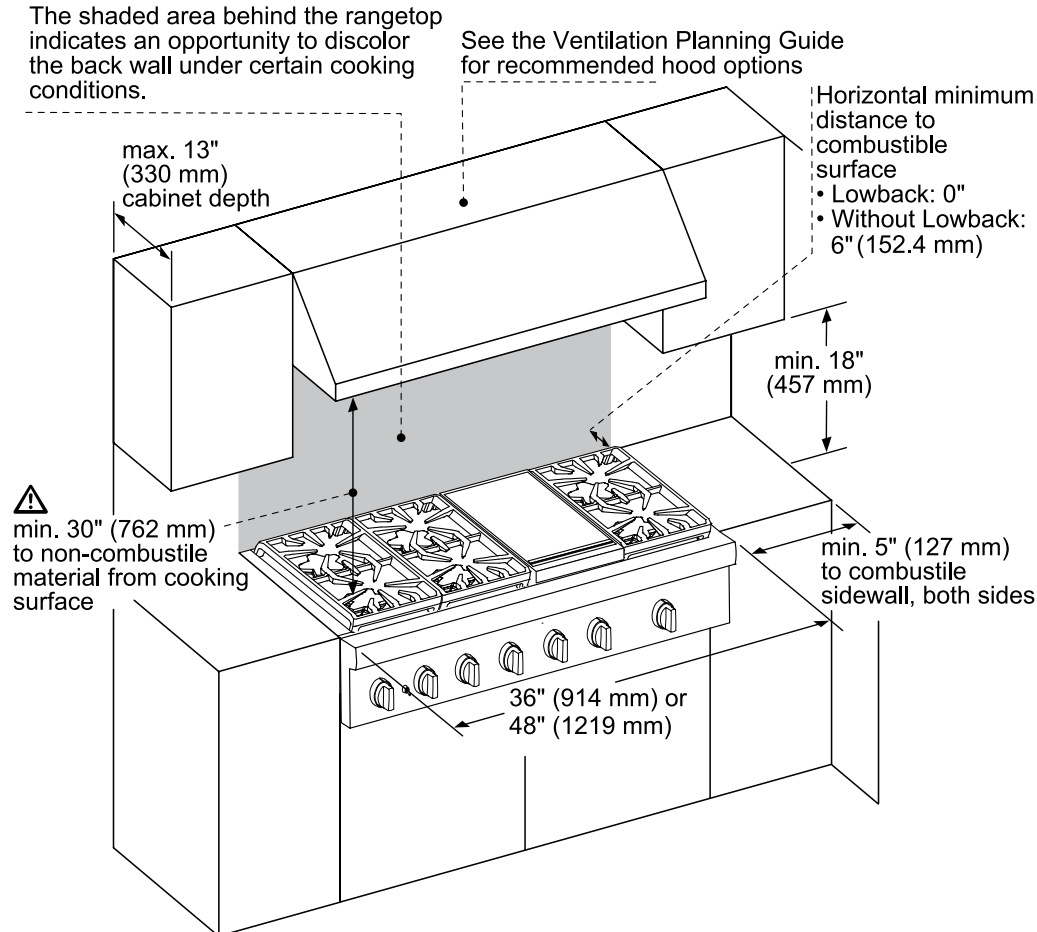

⚠ As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances must be approved by the local codes and/or by the local authority having jurisdiction.

measurements in inches (mm)

NOTE: A 36-inch minimum clearance is required between the top of the cooking surface and the bottom of an unprotected cabinet. A 30-inch clearance can be used when the bottom of the wood or metal cabinet is protected by not less than 1/4 inch of a flame retardant material covered with not less than No. 28 MSG sheet steel, 0.015 inch (0.4 mm) thick stainless steel, 0.024 inch (0.6 mm) aluminum, or 0.020 inch (0.5 mm) thick copper.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2024 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



VCIN36GWS

36-INCH CUSTOM INSERT

PROFESSIONAL COLLECTION

Thermador ★

FEATURES & BENEFITS

- Revel in creative freedom with Professional Collection custom inserts that can blend in with cabinetry or make a bold statement
- Wi-Fi Enabled for a fully connected experience via the Home Connect® app
- Powerfully Quiet® system accepts integral, inline, and remote blowers
- Beautiful illumination with multi-level, vivid LED lights
- Features automatic mode, delay shut-off, and check filter light

ACCESSORIES (OPTIONAL)

25 ft. Blower Connector Cable - EXTNCB25W

For use with the following inline and remote blowers: VTR2FZ, VT12FZ

Roofplate

RFPLT1000P - For use with remote blower VTR2FZ

VCIN Trim Notes

NOTE: VCIN_GWS series custom insert models include hood trim pieces to complete the installation.

Remote Control Panel

REMCPU - Ability to vertically install on cabinetry or wall to control hood in a convenient location



GENERAL PROPERTIES

Features

Multi-Level LED Lights with Fading Transitions, Automatic Mode, Check Filter Reminder Light, Delay Shut-Off

Operating Mode	Ducted
Maximum CFM	Blower Sold Separately
Number of Speed Settings	4-Stage
Number of Lights	2
Bulb Type	LED
Light Lumens	100 – 150
Light Color	3500 – 4000 K
Total Power of the Lamps	2.4 W
Damper Included	Yes
Grease Filter Material	Stainless Steel
Grease Filter Type	Commercial Style Baffle Filter
Home Connect® (Wi-Fi Enabled)	Yes

TECHNICAL DETAILS

Watts	See Chart on Page 3
Current	See Chart on Page 3
Volts	120 V
Frequency	60 Hz
Plug Type	Fixed Connection

DIMENSIONS & WEIGHT

Overall Appliance Dimensions (Width of Canopy Included) (HxWxD)	12 13/16" x 33 3/4" x 22"
Minimum Distance Above Gas / Electric Cooking Surface	30" Electric / 30" Gas
Diameter of Air Duct Top	10"
Net Weight	54 lbs

ACCESSORIES (REQUIRED)

Blower (Sold Separately)

BLOWER OPTIONS

Remote Blowers (Mounted to Roof or External Wall)	VTR2FZ – 1000 CFM
Inline Blowers (Mounted Between Kitchen and External Wall)	VT12FZ – 1000 CFM
Integrated Blower (Mounted in Hood)	VTN2DA – 700 CFM
	VTN2FZ – 1000 CFM

WARRANTY

Limited Warranty Parts and Labor	2 Year
----------------------------------	--------

VCIN36GWS


36-INCH CUSTOM INSERT

PROFESSIONAL COLLECTION



HOOD DIMENSIONS

NOTE: VCIN Custom Insert models include hood trim pieces.

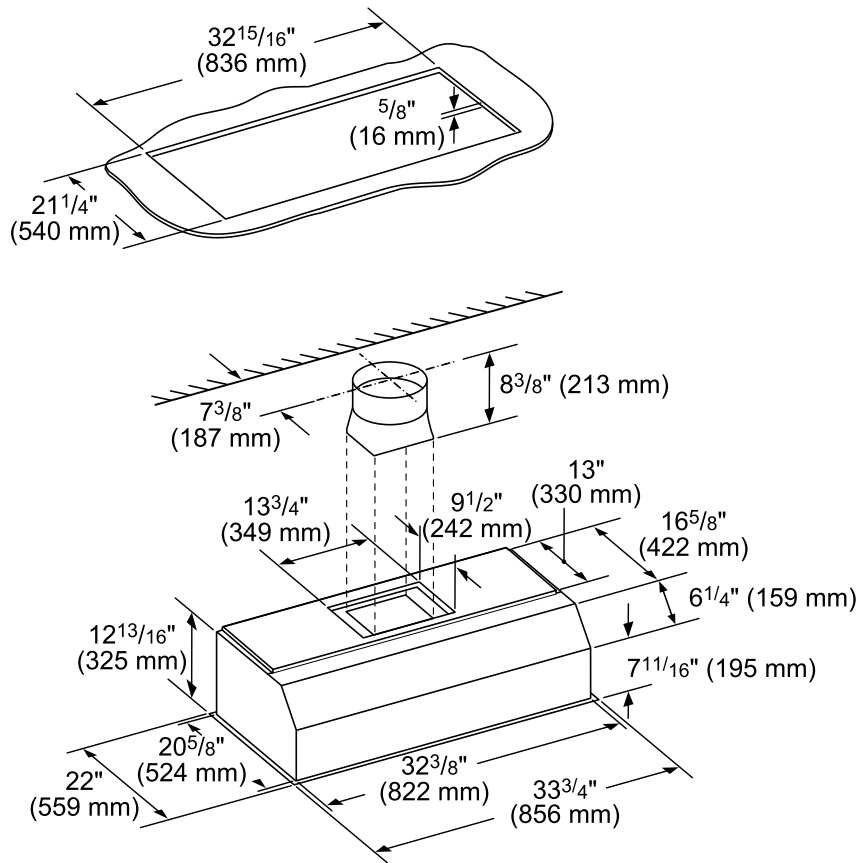

measurements in inches (mm)

VCIN36GWS
36-INCH CUSTOM INSERT
PROFESSIONAL COLLECTION




ELECTRIC LOAD (120V, 60HZ)

		Remote Blower	Inline Blower	Integrated Blower
		VTR2FZ	VTI2FZ	VTN2FZ
VCIN36GWS	Amps	10.3	10.3	8.7
	Watts	1,236	1,236	1,044

REMOTE BLOWERS (MOUNTED TO ROOF OR EXTERNAL WALL)


VTR2FZ – 1000 CFM

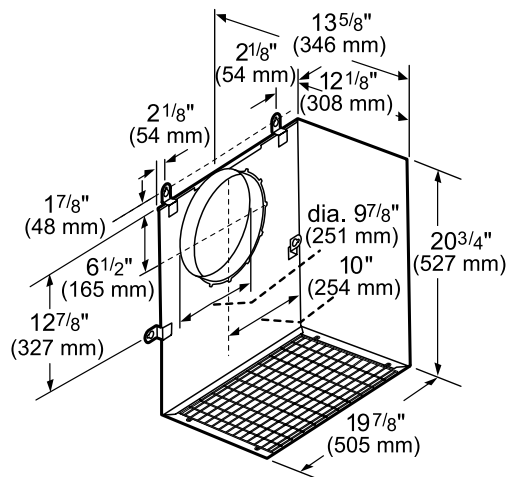

measurements in inches and mm

INLINE BLOWERS (MOUNTED BETWEEN KITCHEN AND EXTERNAL WALL)

VTI2FZ – 1000 CFM

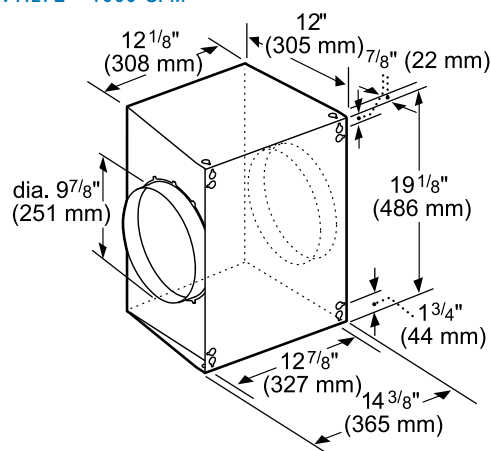

measurements in inches and mm

VCIN36GWS

36-INCH CUSTOM INSERT


PROFESSIONAL COLLECTION

Thermador★

INTEGRATED BLOWERS (MOUNTED IN HOOD)


VTN2DA – 700 CFM

Measurements in inches (mm)

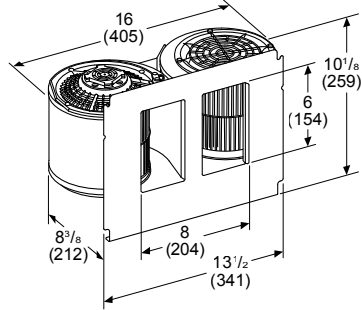

VTN2FZ – 1000 CFM

Measurements in inches (mm)

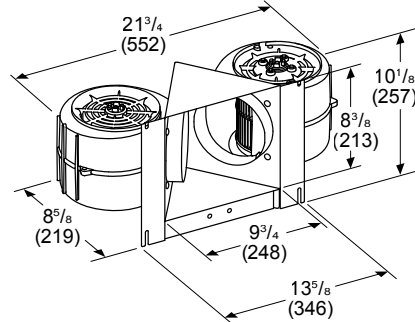


HVI PERFORMANCE VALUES

VCIN36GWS WITH BLOWER VTN2FZ								
Exhaust	Pressure (in. H ₂ O)		Power (W)		CFM		Sones	
	High Speed	Working Speed	High Speed	Working Speed	High Speed	Working Speed	High Speed	Working Speed
Vertical	0.1	0.018	6.92	3.27	920	380	14.5	3.0

REMOTE BLOWER ACCESSORIES

ROOFPLATE-RFPLT1000P

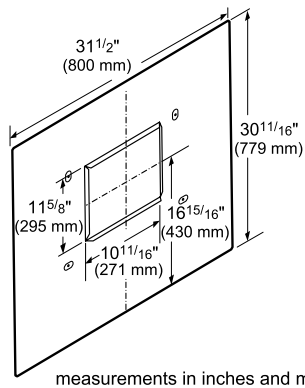


measurements in inches and mm

OPTIONAL ACCESSORIES

REMOTE CONTROL PANEL REMCPW



Convenience at your fingertips: The remote control accessory offers the freedom to extend your hood controls to a more reachable spot

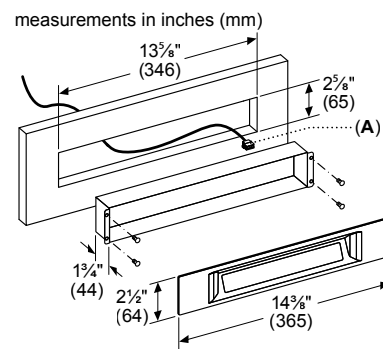

A: DBus Cable length: 30 feet (9180 mm)

EXTNCB25W

For use with the following Inline and Remote Blowers: VTR2FZ, VT12FZ

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.



VENTILATION ACCESSORIES BLOWERS


MASTERPIECE® & PROFESSIONAL COLLECTION



CHOOSING THE CORRECT BLOWER

A variety of interior and exterior blower options (Remote, Inline or Integrated/Internal) are available for Thermador Professional and Masterpiece® Hoods. If the unit you have selected does not have a blower, one can be purchased separately. Blower selection will vary based on the volume of air that needs to be moved and the length and location of the duct run. For long duct runs with multiple turns and bends, consider using a more powerful blower. For the most efficient air flow exhaust, use a straight run or as few elbows as possible.


REMOTE BLOWERS

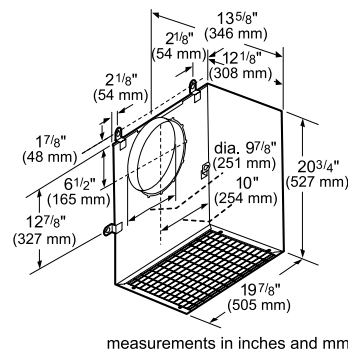

measurements in inches and mm

VTR2FZ

- 1000 Max. CFM
- 10" Diameter Duct
- 120 V / Hertz – 60 Hz
- Dedicated breaker – 15 AMP
- Mounted on roof or exterior wall
- Net Weight – 41 lbs.
- RFPLT1000P – Roof mounting plate accessory sold separately
- EXTNCB25W – 25-ft. blower connector cable sold separately




measurements in inches (mm)

VTR1FZ

- 600 Max. CFM
- 6" Diameter Duct
- 120 V / Hertz – 60 Hz
- Dedicated breaker – 15 AMP
- Mounted on roof or exterior wall
- Net Weight – 24 lbs.
- RFPLT600P – Roof mounting plate accessory sold separately
- EXTNCB25W – 25-ft. blower connector cable sold separately


INLINE BLOWERS



measurements in inches and mm

VT12FZ

- 1000 Max. CFM
- 10" Diameter Duct
- 120 V / Hertz – 60 Hz
- Dedicated breaker – 15 AMP
- Mounted along the duct line between the kitchen and the exterior wall
- Net Weight – 30 lbs.
- EXTNCB25W – 25-ft. blower connector cable sold separately



measurements in inches and mm

VT11FZ


- 600 Max. CFM
- 6" Diameter Duct
- 120 V / Hertz – 60 Hz
- Dedicated breaker – 15 AMP
- Mounted along the duct line between the kitchen and the exterior wall.
- Net Weight – 19 lbs.
- EXTNCB25W – 25-ft. blower connector cable sold separately

VENTILATION ACCESSORIES BLOWERS

MASTERPIECE® & PROFESSIONAL COLLECTION

Thermador★

INTEGRATED BLOWERS

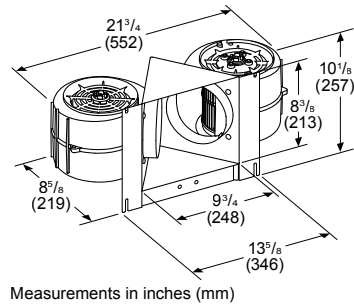


Measurements in inches (mm)

VTN2FZ


- 1000 Max. CFM
- 10" Diameter Duct
- 120 V / Hertz – 60 Hz
- Dedicated breaker – 15 AMP
- Internal blower mounted within hood
- Net Weight – 19 lbs.

Measurements in inches (mm)



VTN2DA


- 700 Max. CFM
- 10" Diameter Duct
- 120 V / Hertz – 60 Hz
- Dedicated breaker – 15 AMP
- Internal blower mounted within hood
- Net Weight – 14 lbs.

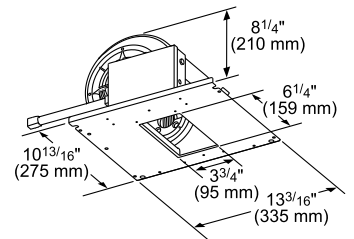

measurements in inches (mm)

VTN1DZ

- 400 Max. CFM
- 6" Diameter Duct
- 120 V / Hertz – 60 Hz
- Dedicated breaker – 15 AMP
- Internal blower mounted within hood
- Net Weight – 10 lbs.



measurements in inches (mm)

VTD600P – DOWNDRAFT

- 600 Max. CFM
- 8" Diameter Duct
- 120 V / Hertz – 60 Hz
- Dedicated breaker – 15 AMP
- Internal blower mounted within hood
- Net Weight – 20 lbs.

HVI PERFORMANCE VALUES

Models	Exhaust Discharge	Duct Size	Speed	Static Pressure (w.g.)	WATTS	CFM	Sones
VTI1FZ	Horizontal	6" Dia.	High	0.2"	423	530	-
VTI2FZ	Horizontal	10" Dia.	High	0.2"	747	920	-
VTR1FZ	Horizontal	6" Dia.	High	0.03"	393	410	-
VTR2FZ	Horizontal	10" Dia.	High	0.03"	812	830	-
VTN2DA	Horizontal	10" Dia.	High	0.1"	504	640	8.5
	Vertical	10" Dia.	High	.01"	511	650	8
VTN2FZ	Vertical	10" Dia.	High	0.1"	810	920	14.5
VTN1DZ	Horizontal	6" Dia.	High	0.1"	255	330	7
VTD600P	Horizontal	8" Dia.	High	0.1"	530	560	-



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly perceived loudness, based on laboratory measurements.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2025 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.