
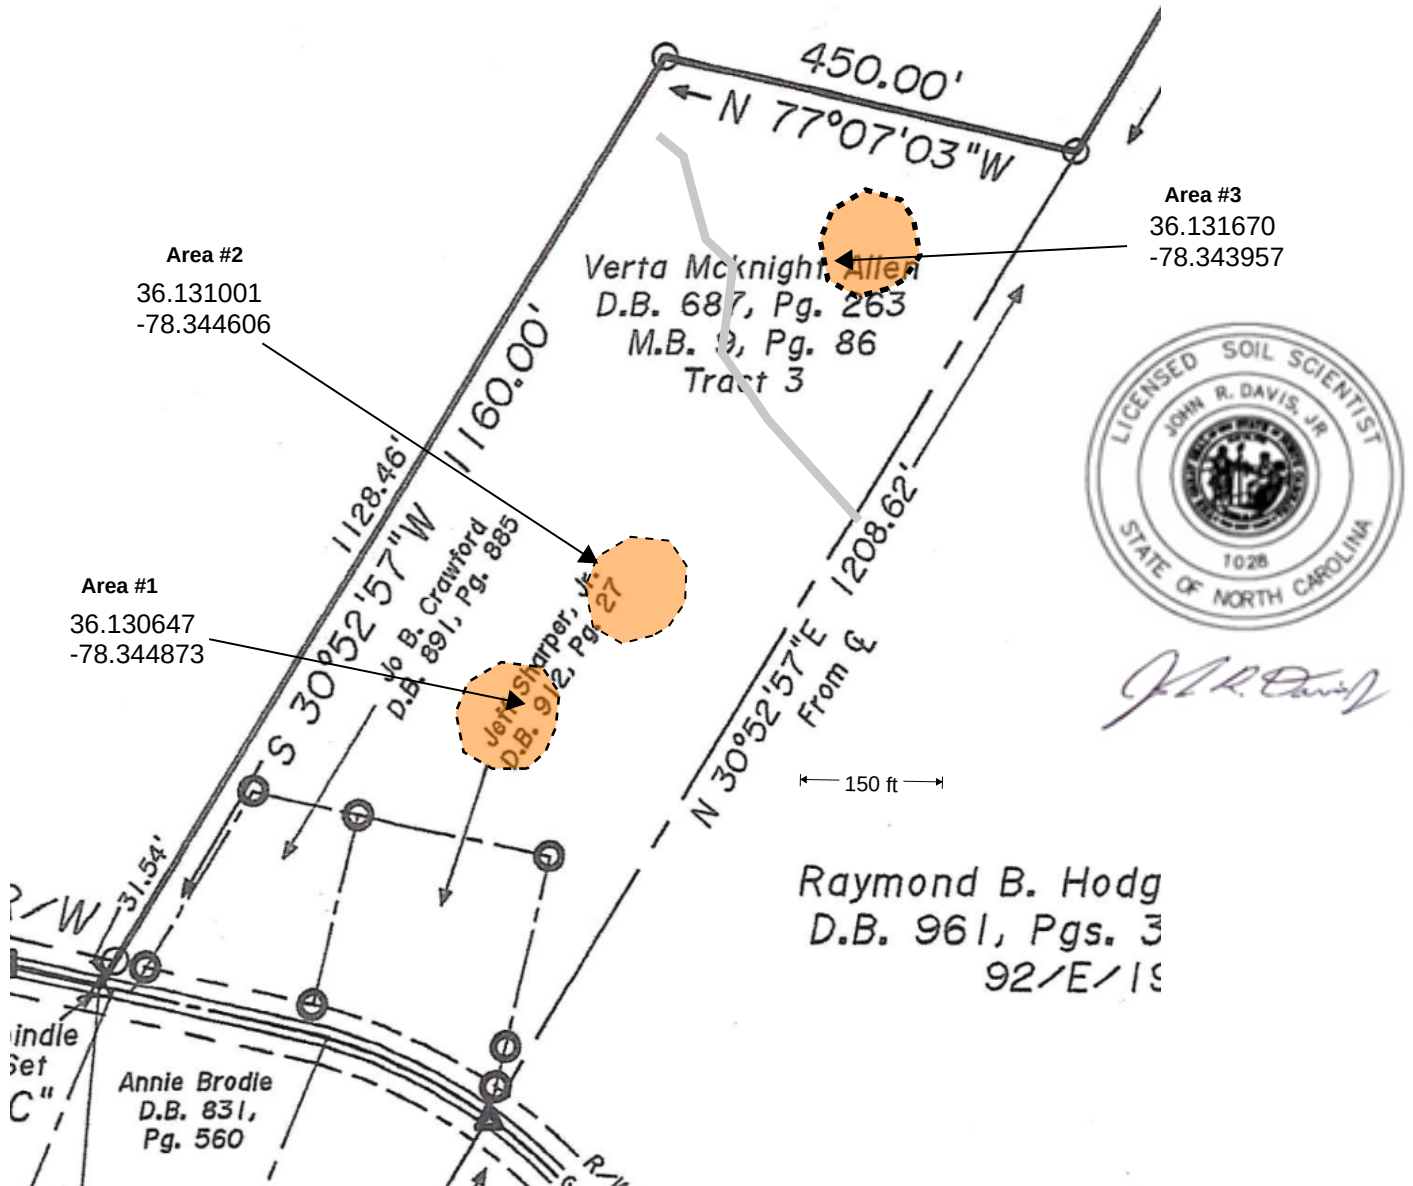


Detailed Soil Study for Septic System Suitability
March, 2024 John R. Davis, Jr. LSS
Hodge Road
Franklin County, NC



The soil areas shown in "Orange" are **suitable** for standard gravel or gravelless septic trenches. The soil depth is greater than 30 inches of sandy loam over sandy clay loam and clay material. Each of the three areas has at least 10,000 square feet of usable soil that can be used for a septic system with a soil loading rate of 0.3 to 0.4 gpd/sf. There may be other areas of usable soil on this property.