

11-00
2-19-10

* At Grade *

PERMIT NUMBER 06514

GRANVILLE-VANCE DISTRICT HEALTH DEPARTMENT
IMPROVEMENT AND OPERATION PERMITS

COUNTY:	TAX NO.	TYPE OF ESTABLISHMENTS			*THIS PERMIT SHALL BE ACCOMPANIED BY A LAYOUT SHOWN ON A PLAT, INCLUDING SYSTEM REQUIREMENTS.
Granville	152400891379	RESIDENCE ☒	NUMBER OF BEDROOMS:	NUMBER OF OCCUPANTS:	
	SR. NO. 1712	BUSINESS ☐	3	5 per	
OWNER: Circle B		OTHER ☐	WATER SUPPLY	WELL ☒	
APPLICANT'S ADDRESS:		TYPE OF WASTEWATER SYSTEM	INITIAL INSTALLATION	REPAIR	*THIS IMPROVEMENT PERMIT IS SUBJECT TO REVOCATION IF THE INTENDED USES CHANGE FROM THOSE SHOWN ON THE IMPROVEMENT PERMIT. CHANGES SHALL REQUIRE HEALTH DEPARTMENT APPROVAL.
7209 Martin Rd Zebulon NC 27597			Type II a	Type II a	
PROPERTY ADDRESS/LOCATION:		DESIGN FLOW:	360 gpd		
Cideridge Court		LTAR:	25 gpd/sf ²		
SUBDIVISION:		ABSORPTION AREA:	1440 sf ²		
131amtlely Place		TRENCH WIDTH:	3'		
LOT NUMBER: 7		TRENCH DEPTH:	12"-14"		
REFERENCE SKETCH (SEE PLAT FOR DETAILS)		TRENCH SPACING:	9' O.C.		
Lines dug level and		TOTAL TRENCH LENGTH:	480'		
On contour - flags		NUMBER OF TRENCHES:	4		
In field by Health Dept.		GRAVEL DEPTH:	12"		
12"-14" trench depth		TANK SIZE:	1000 gal.		
6"x8" approved		PUMP TANK SIZE:			
cover to be		DISTRIBUTION DEVICE:	Distribution		
inspected -			130x		
gravel is highly					
recommended -					

PERMIT VALID FOR: 5 YEARS
YES ☒ NO ☐

NO EXPIRATION
YES ☒ NO ☐

***** IMPROVEMENT PERMIT DATE: 9-14-07 *****

FOR: Circle 13
ISSUED BY: David Cumber

CONSTRUCTION AUTHORIZATION FOR IMPROVEMENT PERMIT# 06514

Unless otherwise indicated, the same conditions above apply regarding system type, layout, location and installation requirements.
(The wastewater system cannot be installed until authorization is signed)

Comments: Upslope surface swale may be required to divert surface water

Date: 9-14-07 Environmental Health Specialist: David Cumber
Construction Authorization Addendum ☐ Yes ☒ No

OPERATION PERMIT

DATE: 2-19-10

SYSTEM INSTALLED BY: Granville
ISSUED BY: David Cumber

PERFORMANCE, MONITORING, MAINTENANCE AND OPERATION
AS REQUIRED BY RULE .1961

D AREA

S69°52'04"W

1
51 S.F.
6 AC.

279°02"E
35.57'


105 = 11

Public R/W
Coleridge
Court

0.918 AC.

DB 920/562
PB 28/154

Chris
Gochi
DB 1
PB 2

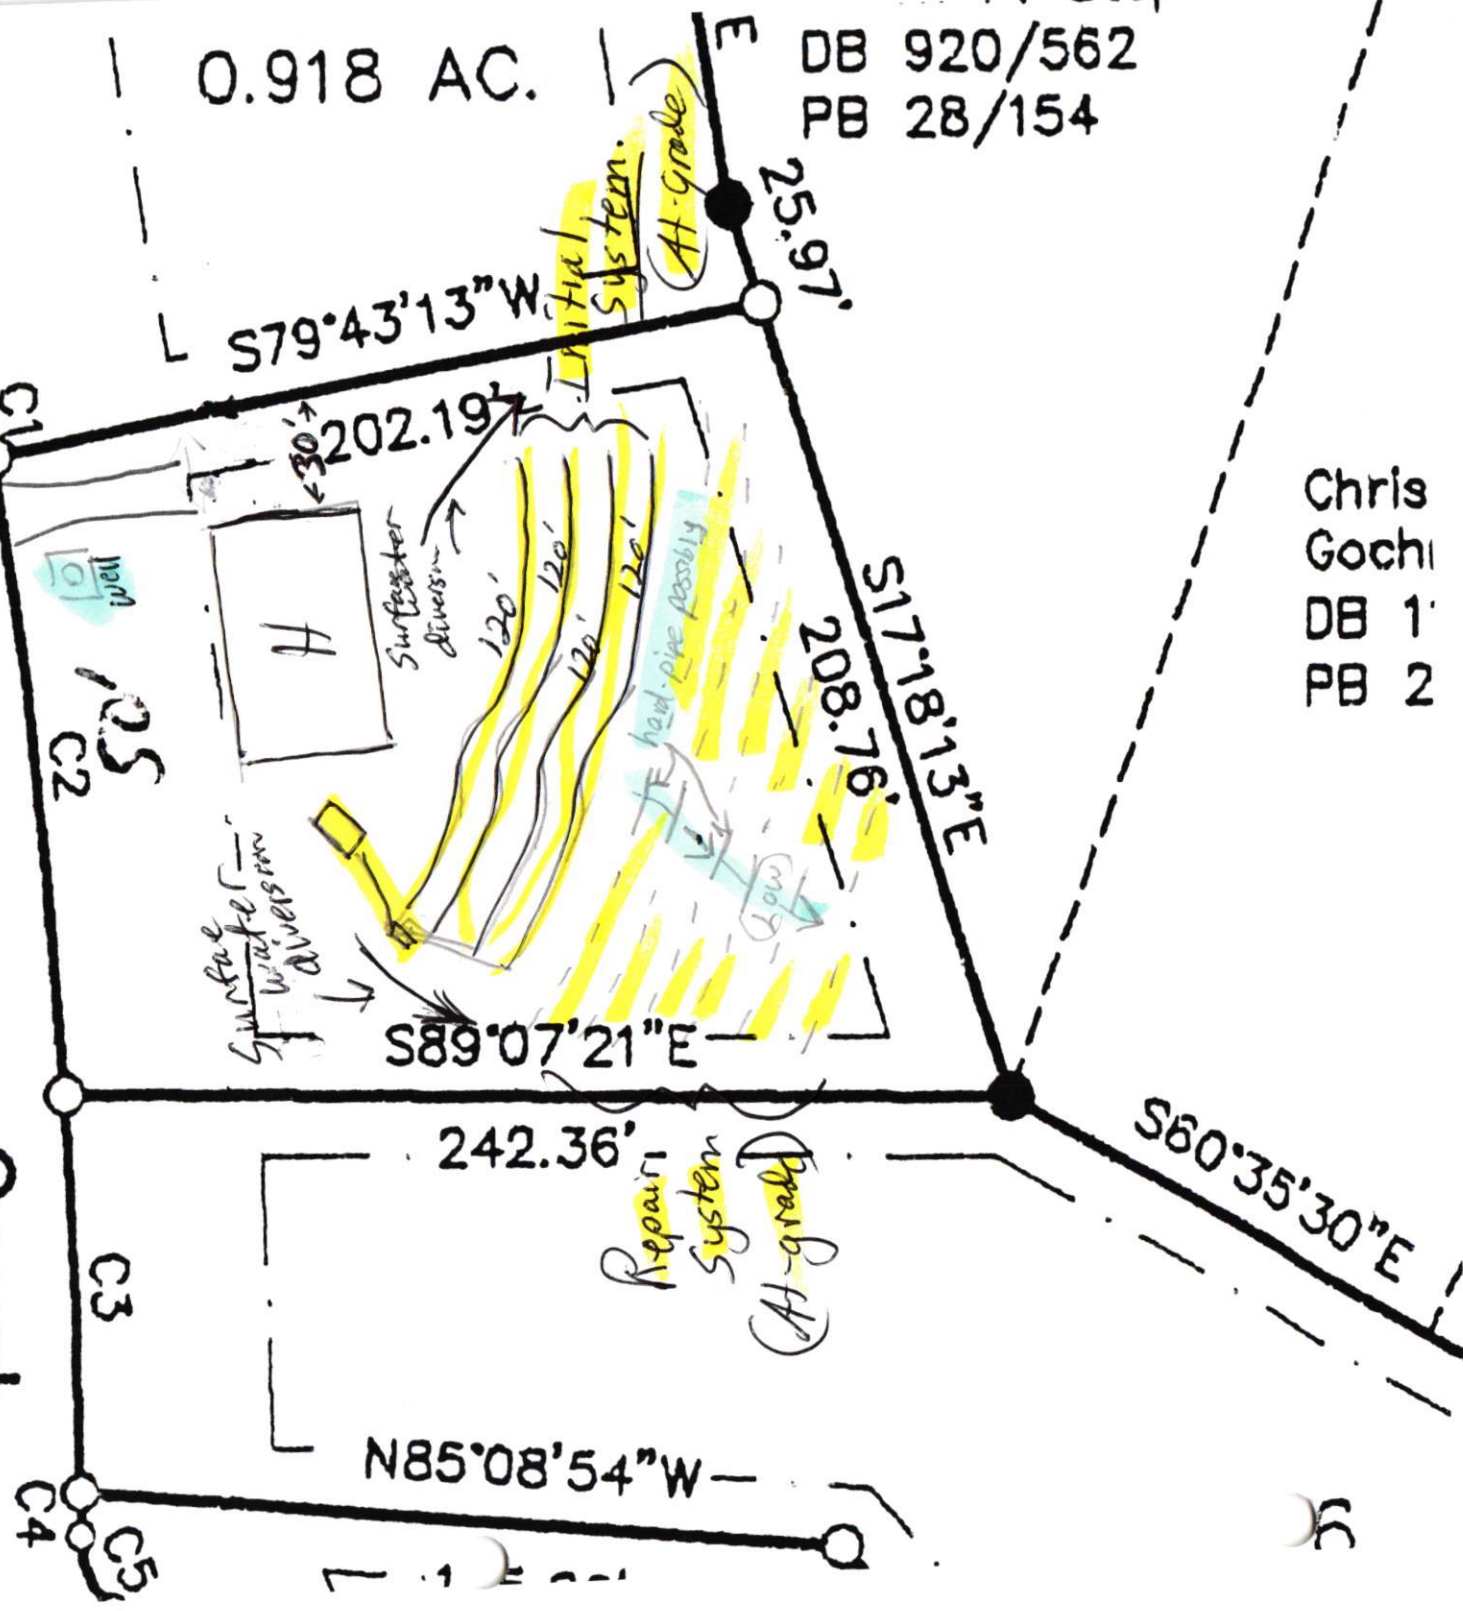

Granville - Vance District Health Department

00218

Environmental Health

Well Construction Permit

Owner/Applicant: Circle 3 Builders Date: 2-26-2010
Address or Location of Property: Coleridge Court


Subdivision & Lot #: Briantley Place #7 Septic Permit #: 6514
Zoning Permit #: 15369 Environmental Health Specialist: David Cumbee

This well permit is to locate and site the area that a private groundwater well may be established on the property listed above by the Environmental Health Specialists of Granville County. If one does not locate the well in the approved area and complete the well as specified by the 15A NCAC .02C rules, then permits may be revoked. At completion of drilling of the well, grout must be witnessed by EHS and a well log turned into Environmental Health.

Minimum Setbacks: (these are the main setbacks, but not all required setbacks)

Setback from property lines – 10 ft Setback from septic tank and drain field, including repair area – 100 ft
Setback from structural foundations – 25 ft Setback from ponds, lakes or other bodies of water – 50 ft

Site Sketch:

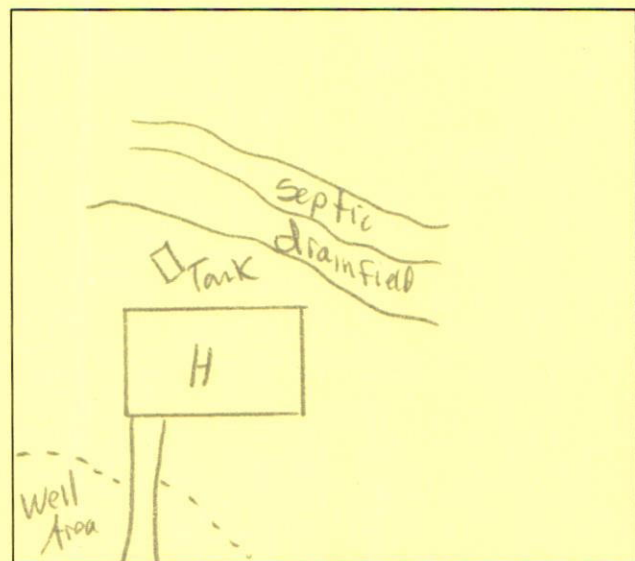

Conditions: Call 693-2688 w/questions

Authorized Agent: David Cumbee
Date: 2-26-2010

Well Grout: (Circle or write in)

Witnessed: Yes or No EHS Agent: David Cumbee
Date: 2-26-10 Annular Space Open: Yes or No
Over reamed: Yes or No
Method: Pump ☒ Poured Pressure
Depth Grouted: 20 ft
Well Log received: Yes or No (EHS to Attach to Permit)

Southern

Well Final: (Place a check mark when finalized)


Seal Present and Intact: ☒ Air Vent: ☒
Hose Spigot: ☒ Electrical Box: ☒
Pump Installer Tag: ☒ Well Installer Tag: ☒
All holes sealed: ☒ 12" above grade: ☒

Comments:

Seals

Well Completion Permit: Carolyn Chapin, EHS
Date Completed: 4-23-10

Water Samples Taken: Date:
EHS: Results:
Retest: Results:

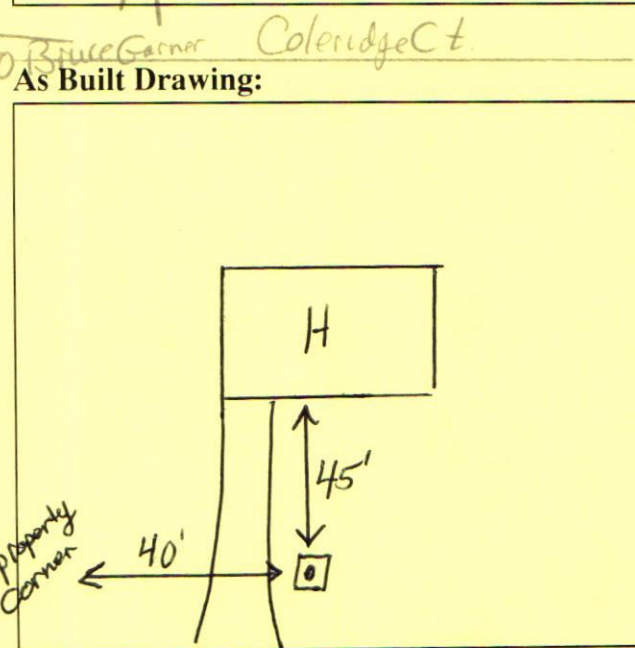

Granville – Vance District Health Department
Environmental Health

Pin 182400891379

Permit Number 6514

☒ Improvement Permit

☒ Construction Authorization

Final Sketch

Circle B

Applicants Name

Brantley Place - lot #7

Subdivision – Section – Lot

Physical Address: Cedaridge Ct

Brantley

System Installer

2-19-10

Date

System design and details as installed.

Septic Tank Information:

Date: 9-2-09

Manufacture: D+B CAP-1000

ID #: STB-046

Pump Tank Information:

Date: /

Manufacturer: /

ID #: /

Distribution Box ☒


Pressure Manifold /

Serial Distribution /

Type of Facility: Residence

Number of Bedrooms: 3

Type of System: Accepted EZ-Flow

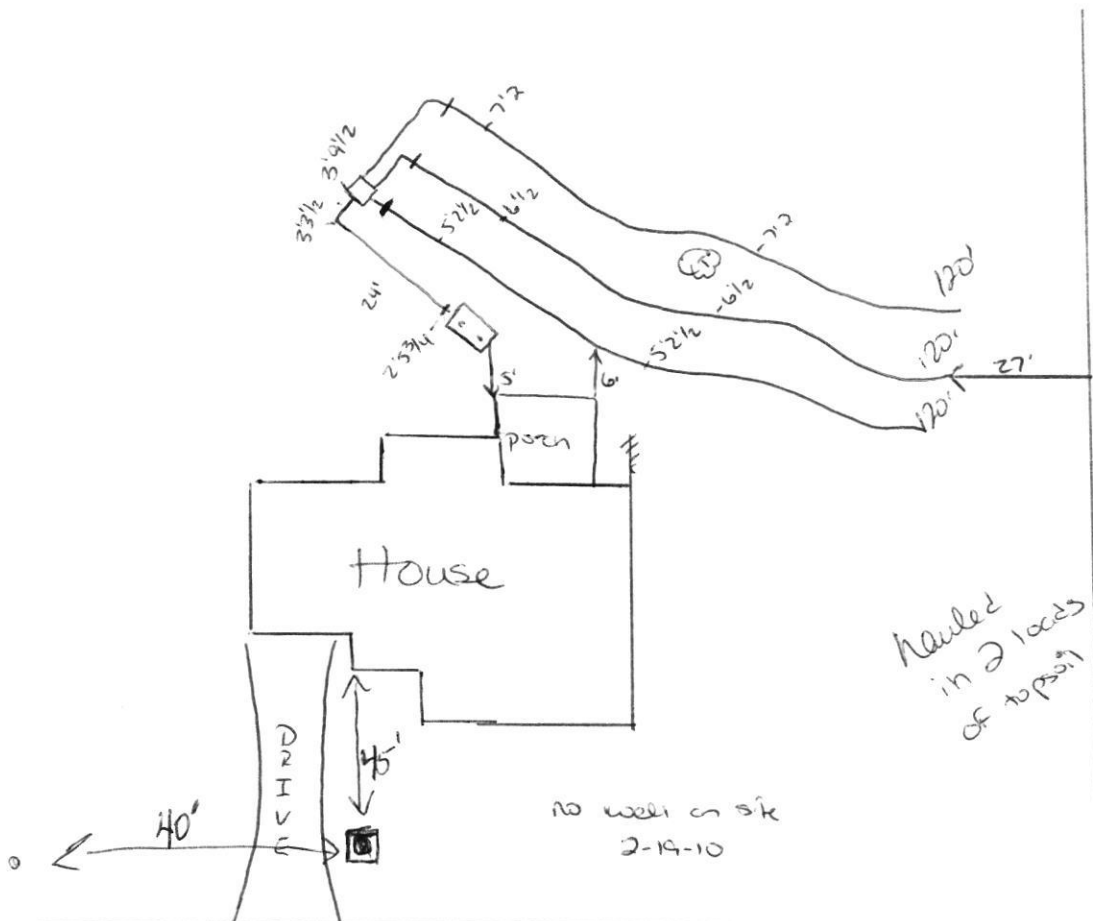

Cassie O'Connell PEHS

Authorized Signature

2-19-10

Date