


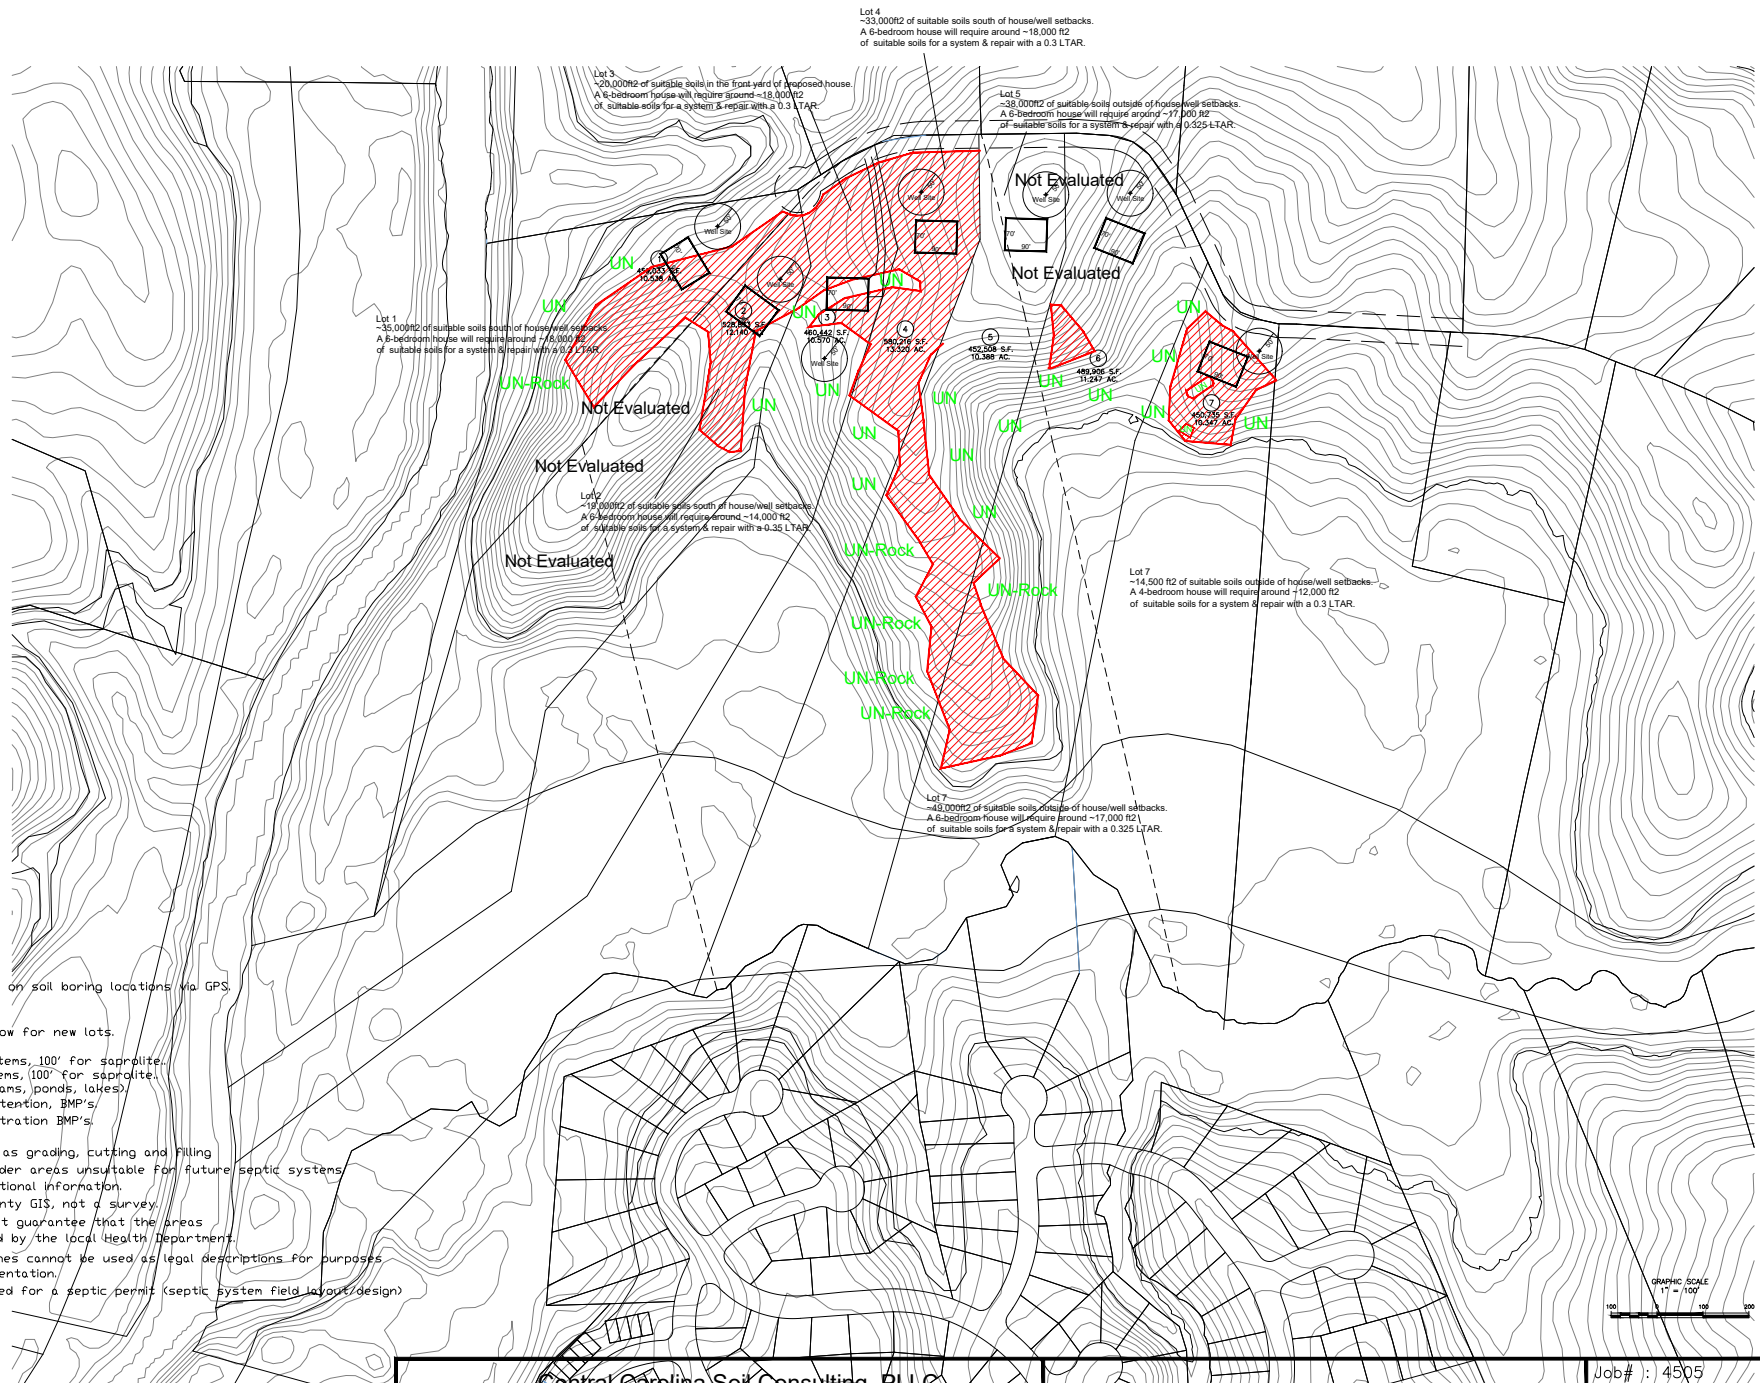

*Preliminary Soils Evaluation
 *Soil boundary was sketched based on soil boring locations via GPS.

*Septic system setbacks listed below for new lots.
 1) 10' from property lines.
 2) 50' from wells for primary systems, 100' for septic.
 3) 50' from wells for repair systems, 100' for septic.
 4) 50' from surface waters (streams, ponds, lakes).
 5) 50' from Wet Ponds or Wet Detention, BMP's.
 6) 25' from dry detention or infiltration BMP's.

*Any mechanical disturbances such as grading, cutting and filling of the suitable soil areas can render areas unsuitable for future septic systems.
 *See accompanying report for additional information.
 *Base map acquired from Wake County GIS, not a survey.
 *Due to Soil Variability, CCSC cannot guarantee that the areas shown as suitable will be permitted by the local Health Department.
 *The preliminary (approximate) soil lines cannot be used as legal descriptions for purposes of a land transfer or legal documentation.
 *Additional field work may be required for a septic permit (septic system field layout design)

Central Carolina Soil Consulting, PLLC
 1900 South Main Street, Suite 110
 Wake Forest, North Carolina 27587
 Phone (919)569-6704 Fax (919)569-6703

Preliminary Soils Evaluation
 Tracts 1-7
 >70-acres
 Wake County, North Carolina

Job# : 4505
 Drawn By : JH
 Date : 5/6/24
 Revision : 00/00/0000