




LINE SCHEDULE SYSTEM				
LINE NUMBER	COLOR	FIELD ELEVATION	LENGTH	DESIGN LENGTH
1	YELLOW	4.4	90	90
2	PINK	4.9	90	90
3	ORANGE	5.4	90	90
4	YELLOW	5.8	90	90
5	BLUE	6.2	90	90
6	PINK	6.7	90	
7	YELLOW	7.0	90	
8	ORANGE	7.3	90	

System: Gravity to D-Box
Lines: 1-5, (450')
Accepted Status System
0.3 Soil LTAR
24" Trench Bottom

Repair: Gravity to D-Box
Lines: 6-8 (270')
T&J Panel Block
0.3 Soil LTAR
24" Trench Bottom

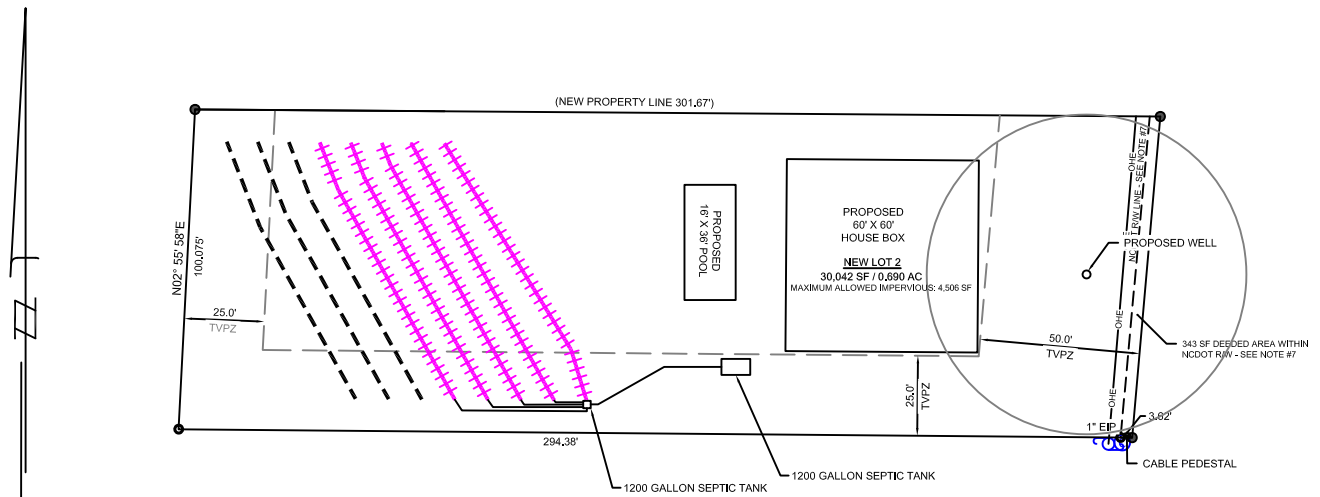

- *Keep tanks and drain lines 10' from property lines.
- *Not a survey.
- *Not a guarantee of a septic permit.
- *Keep supply lines >5' from property lines.
- *Some lines are flagged longer in the field than lengths indicate.
- *No grading septic area.



SCALE:
1" = 60 ft.



Central Carolina Soil Consulting, PLLC
1900 South Main Street, Suite 110
Wake Forest, North Carolina 27587
Phone (919)569-6704 Fax (919)569-6703

4-Bedroom
Septic System Layout
Lot 2 Bells Lake Road Subdivision
Raleigh, Wake County, North Carolina

Job# : 4970
Drawn By : MB
Date : 01/22/2025
Revision: