


PROPOSED IMPERVIOUS SURFACE SUMMARY	
AREA - SQ. FEET	
LOT TOTAL -	30,239
P/HOUSE -	3,447
P/PORCH -	429
P/STEPS -	99
P/ DECK-	73
P/CONC. -	1,330
P/HVAC -	9
<u>TOTAL COVERAGE</u>	
5,387 /	17.8%

50' NEUSE RIVER
RIPARIAN BUFFER
(BM 2022, PG 1913)

100' WAKE COUNTY WATER
SUPPLY WATERSHED BUFFER
(BM 2022, PG 1913)

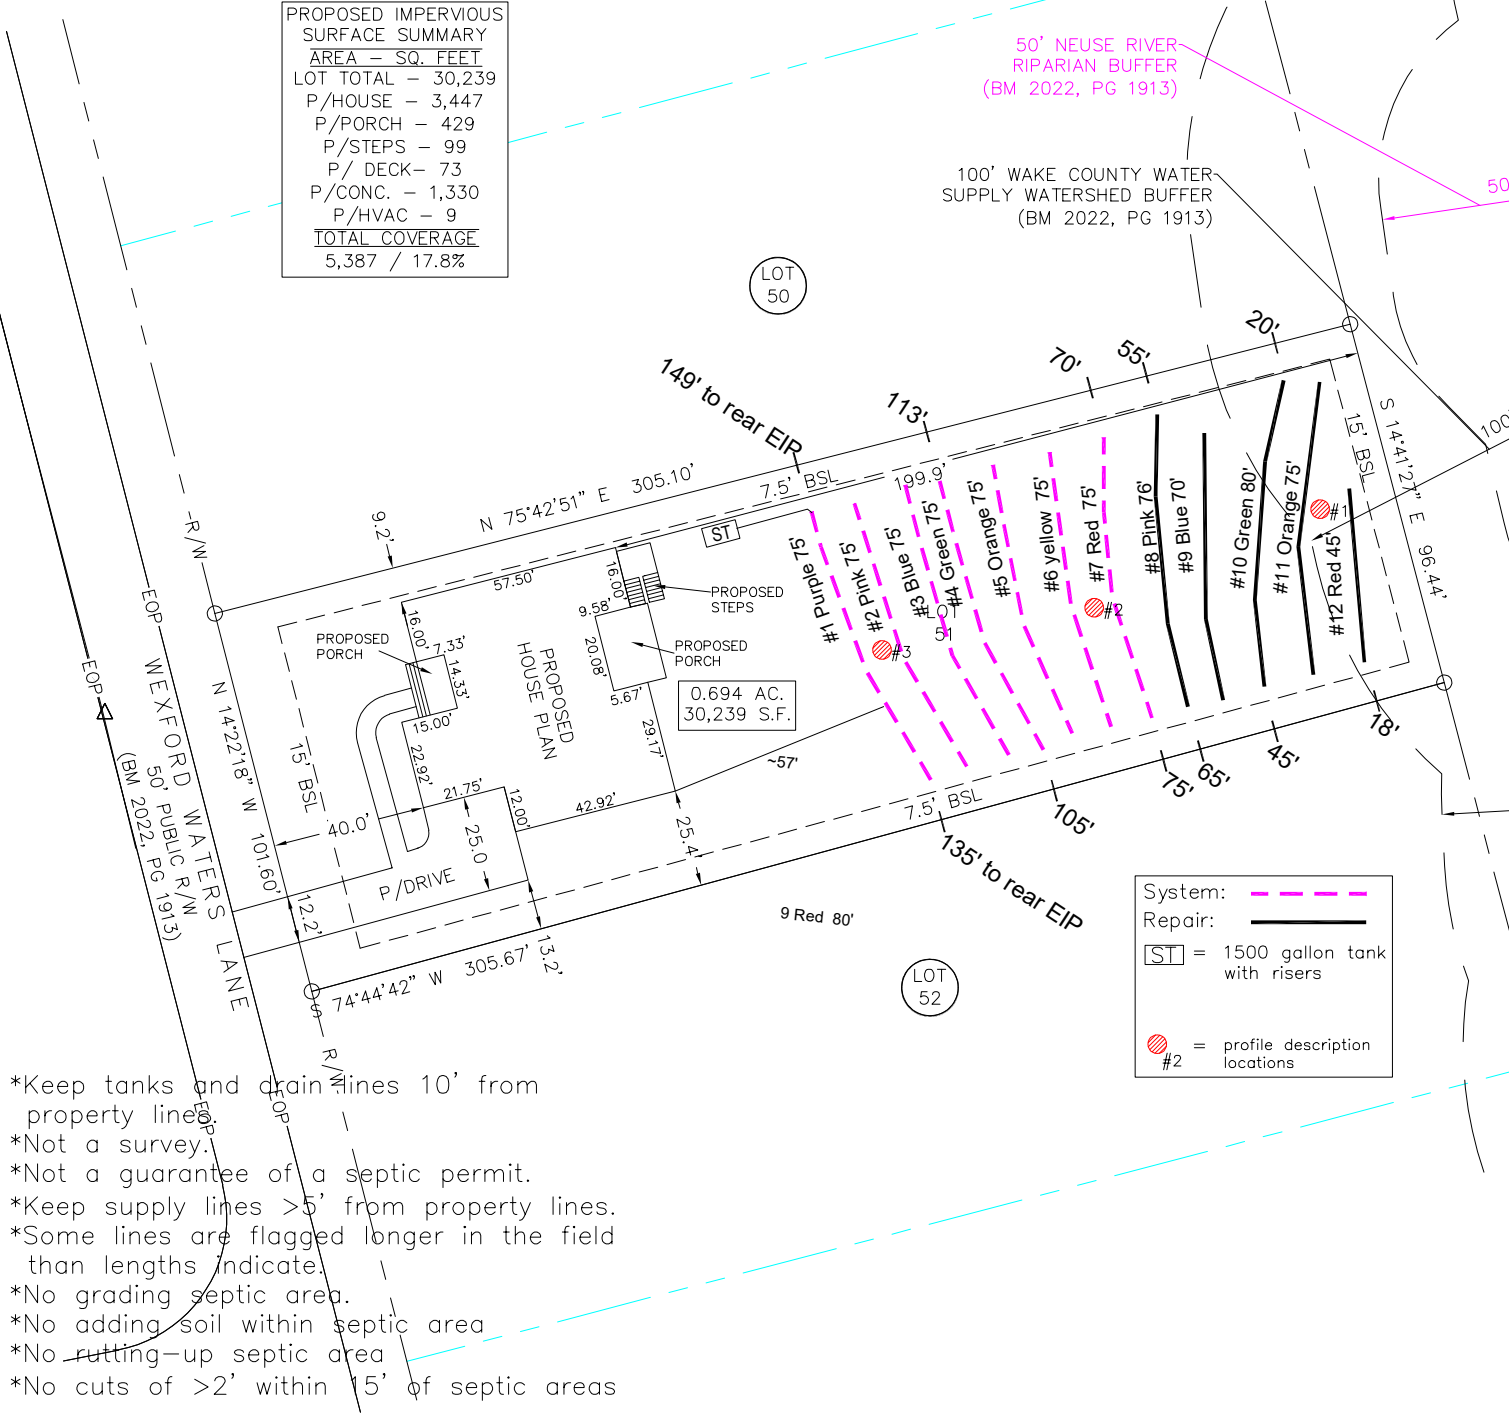

- *Keep tanks and drain lines 10' from property lines.
- *Not a survey.
- *Not a guarantee of a septic permit.
- *Keep supply lines >5' from property lines.
- *Some lines are flagged longer in the field than lengths indicate.
- *No grading septic area.
- *No adding soil within septic area
- *No rutting-up septic area
- *No cuts of >2' within 15' of septic areas

Initial System: Gravity to serial Lines: 1-7, (525')
Accepted Status System (25% reduction) 0.3 Soil LTAR 26" Trench Bottom on the downhill side
Repair System: PM to PPBPS Lines 8-12, 346' 0.3 Soil LTAR 30" Trench Bottom on the downhill side

GRAPHIC SCALE
1" = 50'



Central Carolina Soil Consulting, PLLC
1900 South Main Street, Suite 110
Wake Forest, North Carolina 27587
Phone (919)569-6704 Fax (919)569-6703

5-Bedroom Septic Layout
Lot 51, Wexford Subdivision
Wake County, North Carolina

Job#: 5168
Drawn By: JH
Date: 04/248/2025
Revision: