


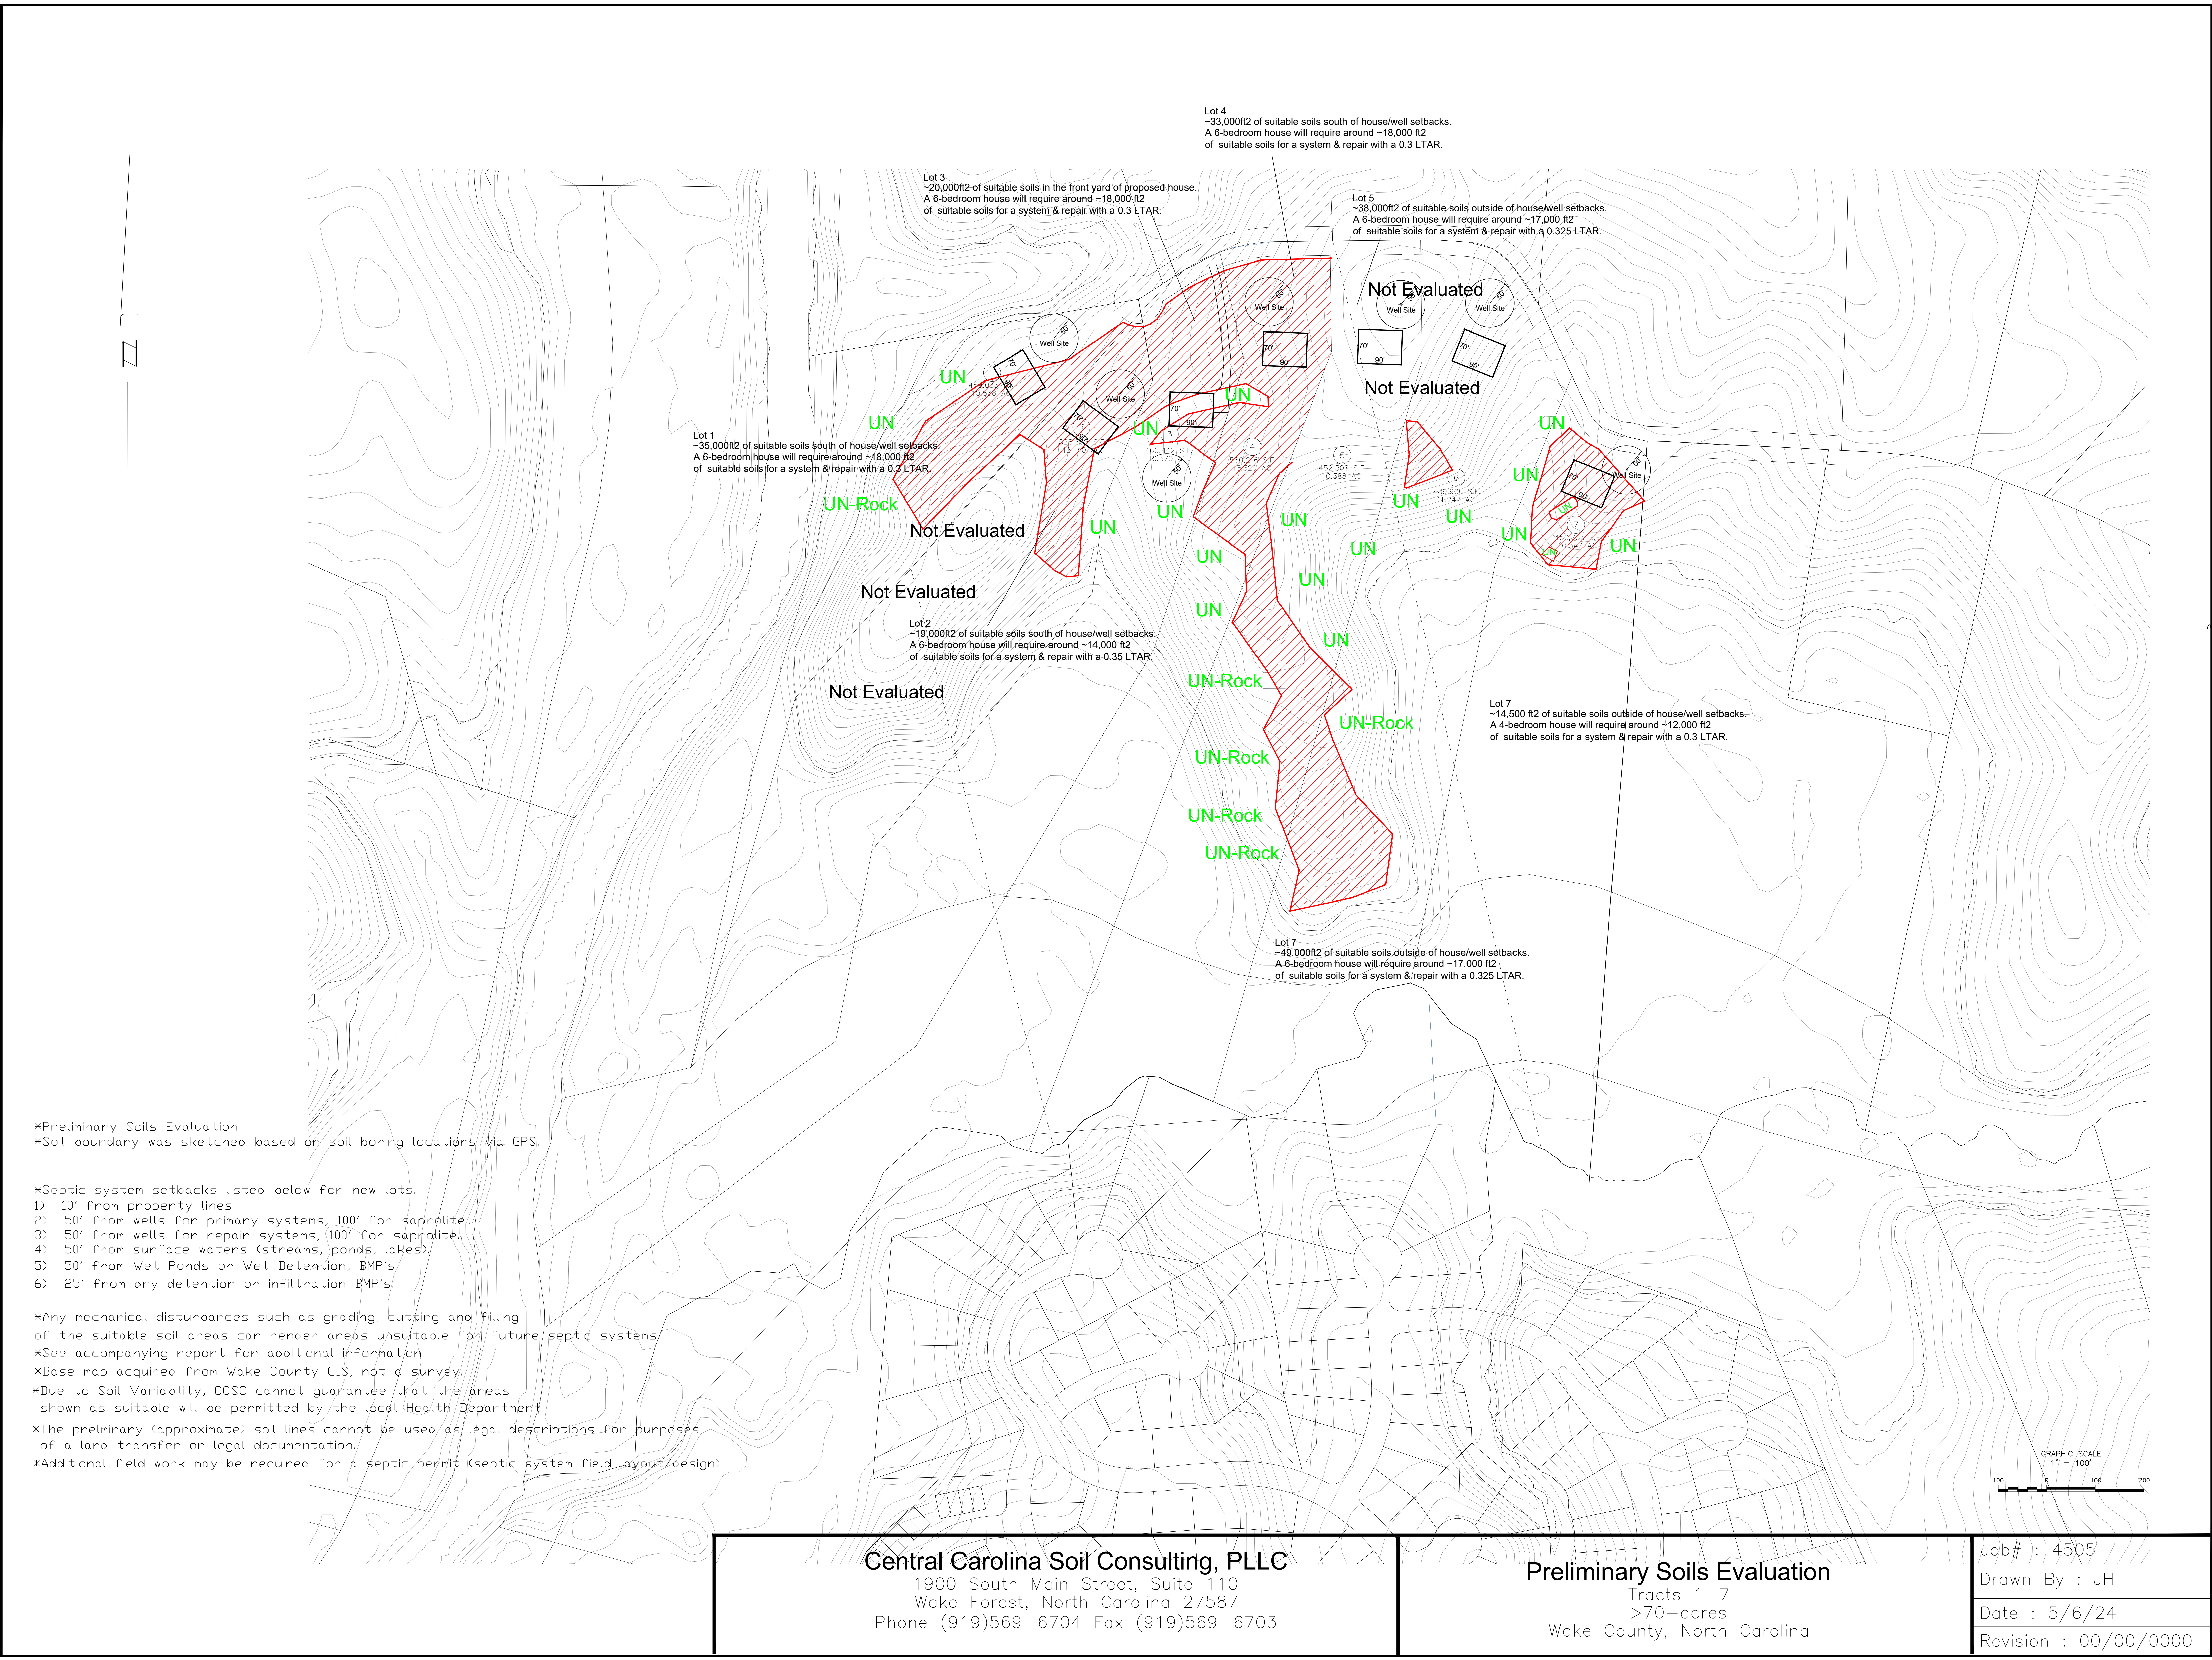

*Preliminary Soils Evaluation
*Soil boundary was sketched based on soil boring locations via GPS.

- *Septic system setbacks listed below for new lots.
- 1) 10' from property lines.
 - 2) 50' from wells for primary systems, 100' for saporlite.
 - 3) 50' from wells for repair systems, 100' for saporlite.
 - 4) 50' from surface waters (streams, ponds, lakes).
 - 5) 50' from Wet Ponds or Wet Detention, BMP's.
 - 6) 25' from dry detention or infiltration BMP's.

*Any mechanical disturbances such as grading, cutting and filling of the suitable soil areas can render areas unsuitable for future septic systems.
*See accompanying report for additional information.
*Base map acquired from Wake County GIS, not a survey.
*Due to Soil Variability, CCSC cannot guarantee that the areas shown as suitable will be permitted by the local Health Department.
*The preliminary (approximate) soil lines cannot be used as legal descriptions for purposes of a land transfer or legal documentation.
*Additional field work may be required for a septic permit (septic system field layout/design)

Central Carolina Soil Consulting, PLLC
1900 South Main Street, Suite 110
Wake Forest, North Carolina 27587
Phone (919)569-6704 Fax (919)569-6703

Preliminary Soils Evaluation
Tracts 1-7
>70-acres
Wake County, North Carolina

Job# : 4505
Drawn By : JH
Date : 5/6/24
Revision : 00/00/0000